

scannex III

ip.buffer Manual



2nd February 2010

Firmware Version 2.50

ip.buffer Manual

<i>Date</i>	<i>Author</i>	<i>Release</i>
2007-06-21	MP	For version 1.00
2007-09-21	MP	For version 1.50 Note: section numbers have changed.
2007-10-01	MP	For version 1.55
2007-10-05	MP	Modem approval updates and minor edits
2007-12-14	MP	For version 1.60 Note: major rewrite
2008-02-11	MP	For version 1.62
2008-03-04	MP	For version 1.63
2008-03-18	MP	For version 1.64
2008-05-02	MP	For version 2.00
2008-06-16	MP	For version 2.10
2008-08-29	MP	For version 2.20
2008-09-03	MP	For version 2.21
2008-12-12	MP	For version 2.30
2009-04-15	MP	For version 2.40
2009-09-22	MP	For version 2.41
2010-02-02	MP	For version 2.50

Copyright © UK 2007-2010 Scannex Electronics Limited. All rights reserved worldwide.

Scannex Electronics Ltd, UK
t: +44(0)1273 715460
f: +44(0)1273 715469

<http://www.scannex.co.uk>
info@scannex.co.uk

Scannex LLC, USA
t: 1-866-4BUFFER
(1-866-428-3337)

<http://www.scannex.com>
info@scannex.com

Table of Contents

1. Introduction.....	1	7.2.5. Modem Out.....	25
1.1. The Range.....	1	7.2.6. SMTP Email Servers.....	27
1.2. Features.....	1	7.2.7. Alerts & Log.....	29
1.3. Block Diagrams.....	3	7.2.8. Alert List.....	33
1.3.1. System Overview.....	3	7.2.9. RADIUS.....	34
1.3.2. Source.....	4	7.2.10. Certificates.....	38
1.3.3. Destination.....	5	7.2.11. FTP.....	40
1.4. Firmware.....	6	7.2.12. Web.....	42
1.4.1. Crypto-Free.....	6	7.2.13. Updates.....	43
1.4.2. SSL.....	6	7.3. Date and Time Synchronize.....	44
2. Fitting Batteries.....	7	7.4. Encryption Keys.....	44
2.1.1. Battery Precautions.....	7	8. Channels.....	45
2.1.2. Installing in an ip.1.....	8	9. Sources.....	47
2.1.3. Installing in an ip.4.....	9	9.1. COM Serial.....	47
3. Physical Mounting.....	10	9.1.1. Settings.....	47
3.1. ip.1 - plastic box.....	10	9.1.2. Connection to a PC serial port.....	49
3.1.1. DIN Rail Mounting.....	10	9.1.3. When using a Y-lead.....	49
3.1.2. Wall mounting.....	10	9.2. TCP.....	50
3.2. ip.2 & ip.4 - metal case.....	10	9.2.1. Match, Send & Heartbeat special characters.....	51
4. Installation.....	11	9.3. UDP.....	52
4.1. Connections.....	11	9.3.1. Syslog Collection.....	52
4.2. Getting Started.....	12	9.3.2. SNMP Trap Collection.....	52
4.3. Forgotten passwords.....	13	9.3.3. RADIUS Accounting Collection.....	53
5. Front Panel.....	14	9.4. FTP Server.....	54
6. Status Web page.....	15	9.4.1. FTP Server Notes.....	55
6.1. Channel: Source.....	15	9.5. None.....	55
6.2. Channel: Storage.....	15	9.6. Common Modules.....	56
6.3. Channel: Destination.....	16	9.6.1. Protocol.....	56
6.4. Modem.....	16	9.6.2. Protocol: ASCII Lines.....	57
6.5. System.....	16	9.6.3. Protocol: Alcatel TCP/IP Port 2533.....	58
7. SETUP.....	17	9.6.4. Protocol: Avaya RSP.....	59
7.1. Web Interface.....	17	9.6.5. Protocol: Binary (full 8-bit).....	59
7.2. Global: Settings.....	18	9.6.6. Protocol: Generic Records.....	60
7.2.1. Network.....	18	9.6.7. Protocol: Inter-Tel Axxess & 5000.....	61
7.2.2. Time.....	22	9.6.8. Protocol: NEC (STX/ETX) Serial.....	61
7.2.3. Power.....	23	9.6.9. Protocol: NEC NEAX TCP/IP.....	63
7.2.4. Modem In.....	24	9.6.10. Protocol: Nortel Meridian & Norstar... ..	64

9.6.11. Protocol: iSDX binary.....	65	12.6.1. Upgrade Firmware.....	90
9.6.12. Time Stamping.....	66	12.6.2. Check for Updates.....	90
9.6.13. Pass-through.....	68	12.6.3. System Memory.....	90
9.6.14. Notification.....	71	12.6.4. Diagnostics Dump.....	90
10. Destinations.....	72	13. Advanced Setup / Configuration.....	91
10.1. Email push (SMTP client).....	72	13.1. Configuration.....	91
10.2. HTTP POST to web server.....	73	13.1.1. Edit.....	91
10.3. FTP Server.....	74	13.1.2. Ad hoc change.....	92
10.3.1. Supported FTP server commands.....	75	13.1.3. Download.....	92
10.4. FTP Push (client).....	76	13.1.4. Upload.....	92
10.4.1. Overwrite and Append.....	78	13.2. Script.....	93
10.5. TCP Server (passive).....	79	13.2.1. Edit.....	93
10.6. TCP Push (active/client).....	80	13.2.2. Download.....	93
10.7. COM port serial.....	81	13.2.3. Upload.....	93
10.8. Legacy Emulation (TCP Server).....	82	13.3. Server Certificate.....	94
10.9. None (Passthrough only).....	83	13.3.1. Generate.....	94
10.10. Destination Common Modules.....	84	13.3.2. Upload.....	94
10.10.1. Data Markers.....	84	13.4. System.....	95
10.10.2. Data Security.....	84	13.4.1. Upgrade Firmware.....	95
10.10.3. Push Triggers.....	85	13.4.2. The Last Resort.....	96
11. Storage.....	86	14. Advanced Topics.....	97
12. Tools.....	87	14.1. Replication of settings.....	97
12.1. General.....	87	14.2. Lua extensions.....	97
12.1.1. Live Record View.....	87	14.2.1. Alert System.....	97
12.1.2. Storage Counters.....	87	14.2.2. Delivery Trigger System.....	98
12.1.3. Reboot Lua.....	88	14.2.3. Comments within Lua code.....	98
12.1.4. Reboot ip.buffer (cold boot).....	88	14.2.4. Sending data to the channel source.....	98
12.2. Modem.....	88	14.3. Example scripts.....	99
12.2.1. Clear timers.....	88	14.3.1. Simple prefix.....	99
12.2.2. Hangup & Reset.....	88	14.3.2. Duplicating data.....	100
12.3. Source, Pass-through, and Destination.....	88	14.3.3. Discarding data.....	100
12.4. Network.....	89	14.3.4. Masking telephone digits.....	101
12.4.1. Ping a device.....	89	15. SNMP Traps.....	102
12.4.2. Listening Ports.....	89	15.1. Trap List.....	102
12.4.3. Network Table.....	89	15.2. Variable Bindings.....	102
12.5. Log.....	89	16. SNMP Agent OID List.....	103
12.5.1. View Log.....	89	17. HTTP Server Implementation.....	104
12.5.2. Send Log.....	89	17.1. Chunked POST.....	104
12.6. System.....	90	17.1.1. Testing.....	104

17.2.Multipart POST fields.....	105	22.1.Modem.....	114
17.3.Server Response.....	105	22.2.EMC.....	114
18.Licenses.....	106	22.3.Safety.....	114
18.1.Lua License.....	106	22.4.European Union (EU) Statement.....	114
18.2.zlib License.....	106	22.4.1.EMC, Safety, and R&TTE Directive Compliance.....	114
18.3.PolarSSL License.....	107	22.4.2.Network Compatibility Declaration....	114
18.4.SNMP Trap Decoding.....	108	22.5.Deutsch.....	114
19.Specifications.....	109	22.6.USA.....	115
20.Modem Country Codes and Approvals.....	110	22.6.1.FCC Registration Information.....	115
21.Safety Warnings.....	112	22.6.2.Repair Information.....	116
21.1.Optional AA Battery Caution.....	112	22.6.3.FCC Rules Part 15 - Computing Devices	116
21.2.Real Time Clock Battery Caution.....	112	22.7.Canada.....	117
21.3.Ethernet Ports Caution.....	112	22.7.1.Industry Canada Information.....	117
21.4.Power Supply Caution.....	112	22.7.2.Industry Canada Regulatory Compliance Information for Class B Equipment.....	118
21.4.1.Scannex Approved PSUs.....	112	23.European Union Waste Electrical and Electronic Equipment (WEEE) Statement.....	119
21.5.General Warnings.....	113	23.1.UK Users.....	119
21.6.Modem Caution (if fitted).....	113	23.2.European Users (outside the UK).....	119
21.7.A note about Power Connection, Surge Protectors, and lightning.....	113	23.3.Manufacturer/Responsible Party.....	119
21.8.South Africa.....	113		
22.Approvals.....	114		

1. Introduction

1.1. The Range

The ip.buffer is designed to collect and store information from such devices as telephone PBXs - for CDR/SMDR collection, for alarm and traffic management, and to allow pass-through access for moves and changes.

The product range includes three main devices:

- ip-4 = 128Mbyte memory with 4 serial ports
- ip-2 = 64Mbyte memory with 2 serial ports
- ip-1 = 32Mbyte memory with 1 serial port

The ip-4 and ip-2 devices include internal temperature monitoring, built in global modem, plus the SEbus expansion connector. They also have an option for 48VDC power. They are both built inside a metal box that can be rack mounted in a 1U high bay.

The ip-1 device has an optional global modem and is housed in a plastic casing with facilities for wall mounting, tie-wrapping, and DIN rail mounting.

All three devices allow battery backup using 3 standard AA NiMH batteries. With fully charged cells the unit can continue to operate for approximately 2 hours.

1.2. Features

All devices have proprietary Scannex features and advanced facilities:

- Collection
 - Auto pin detection on the serial ports¹
 - Auto baud rate and protocol detection on the serial ports
 - Collection from serial and TCP/IP enabled devices²
 - Collection from devices that perform FTP push
 - Collection of UDP data including syslog information and SNMP Traps (with trap decoding and SNMP get queries on connected devices)
 - Support for ASCII, Binary and iSDX data sources
 - Automatic partitioning of NAND flash memory with optional settings for limiting memory sizes of each channel
- Various delivery options including:
 - HTTP/HTTPS post to web server
 - FTP push
 - FTP server

¹ The detection is performed using voltage sensing, so the ip.buffer can detect whether the data source is DCE or DTE wired even with no data

² Each ip.buffer can collect data from as many TCP/IP devices as there are serial ports. Each channel can be assigned to either the serial port or a TCP/IP or UDP/IP collection.

- Email/SMTP push
- TCP/IP push
- TCP/IP server
- COM port serial
- LAN and management features
 - Fully web-based setup and status information
 - “Reflective Routing” on the LAN to allow easy access from different subnets³
 - Email, HTTP POST, and SNMP alert mechanisms to enable a pro-active system
 - Extremely powerful Lua⁴ scripting engine
 - SNTP (Simple Network Time Protocol) time synchronisation with daylight saving option
 - Settings can be quickly replicated across multiple ip.buffer for bulk installations
 - All changes to the settings occur immediately - **no need for reboot**⁵
 - Fully fail-safe firmware upgrades. The power can fail at any point in the upgrade process and the ip.buffer will recover with the old version (or the new version if successfully uploaded).
 - Simple SNMP v1/v2c agent to provide inventory information to SNMP clients
 - Centralised updates via standard web-server (See section 7.2.13)
- Security features
 - Option to authenticate to one or two RADIUS servers
 - https (SSL) access for web pages (optional) (See section 7.2.12)
 - SSL/TLS link encryption for HTTP post, FTP, email, and TCP connections (optional) (See section 10)
 - Additional Scannex 40-bit encryption for further security of the transported data

³ In practise it means you do not have to have a gateway address, or the correct gateway, programmed in the ip.buffer when connecting into it for web services and the like.


⁴ See www.lua.org However, several extensions have been applied to the Lua base.

⁵ Even Lua script changes can occur while the ip.buffer is still running

1.3. Block Diagrams


1.3.1. System Overview

Conceptual view of the ip.buffer (ip.4-128m):

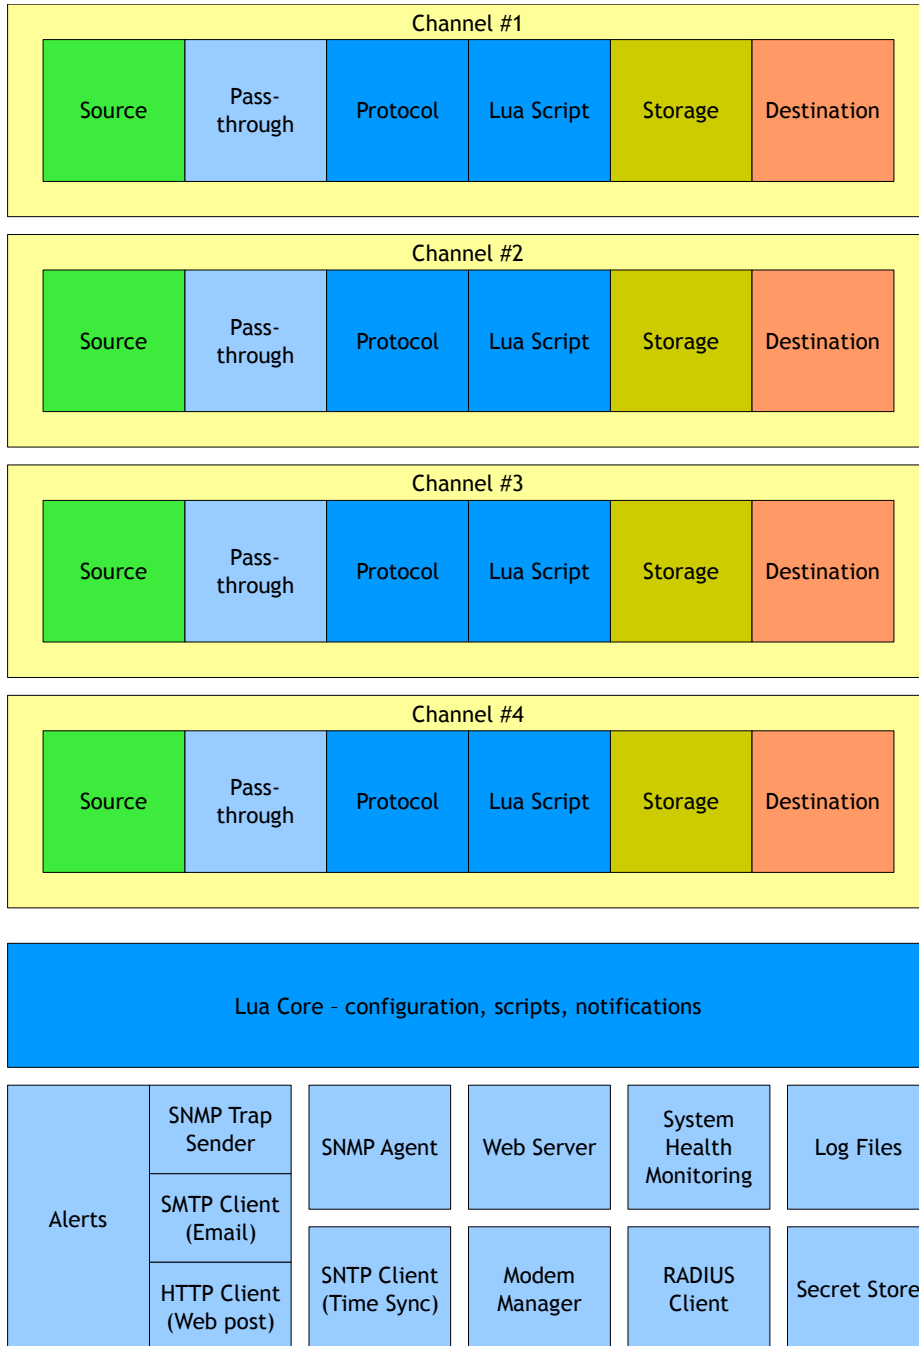

The ip.buffer is “channel based” with each channel allowing separate collection and delivery methods.


1.3.2. Source

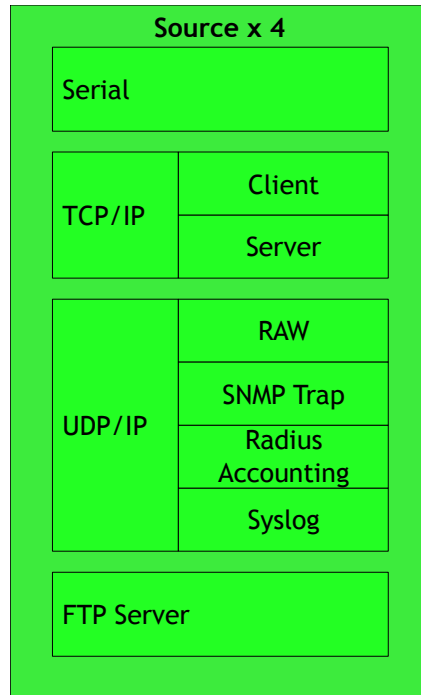

The four source collection modules run independently. Each source can collect from a different source device, and the ip.buffer allows any mix of serial, TCP, UDP or FTP across the four channels.

Although the ip.buffer is “channel based” with custom Lua scripting it is possible to send data across to other channels. For example, one physical data source (e.g. COM port) may contain a mixture of CDR, and Alarms information - custom Lua scripting can split this information into two channel storage areas.

1.3.3. Destination

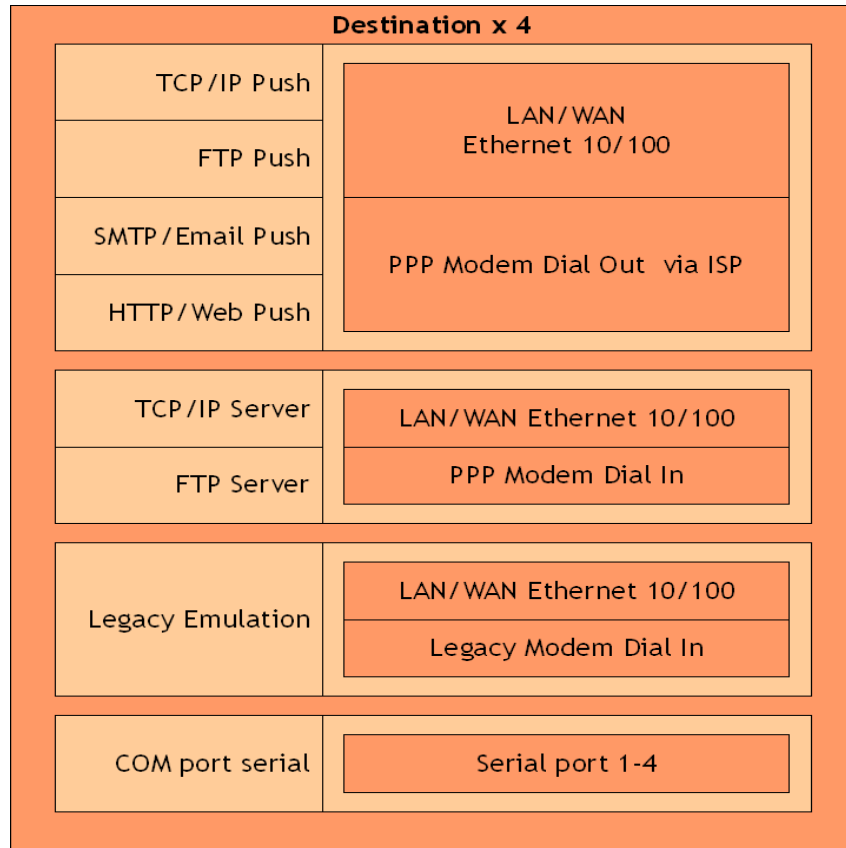

The four destination delivery modules also run independently. Each destination can deliver using a different method. Or, they can use the same method (e.g. FTP Push) but deliver to a different central server. Each channel can be configured to use any combination of LAN/WAN/DSL or Modem interfaces.

1.4. Firmware

The firmware is available in two variants:

1.4.1. Crypto-Free

The Crypto-Free firmware variant has no SSL/TLS options or code. It is provided to comply with certain export/import restrictions around the world. Even if the internal configuration requests SSL/TLS it will not use SSL/TLS - the cipher code is not built into this firmware version.

The firmware is labelled **IPBCFx.xx.xx** where x.xx.xx is the version number.

The version number at the footer of each web page will have the marking “**IPBCF**”.

- The CF / Crypto-free version will not show any of the SSL/TLS options on the web setup pages.

1.4.2. SSL

The SSL firmware variant has full SSL/TLS⁶ code and web options.

The firmware is labelled **IPBSSLx.xx.xx** where x.xx.xx is the version number.

- It is **your responsibility** to check with your country’s current laws before downloading and using the SSL firmware variant in the ip.buffer! Some countries have severe penalties - **you have been warned!** Additionally, if you are re-exporting an ip.buffer you must comply with all local export regulations. Scannex can assume no liability or responsibility for the use or misuse of the SSL variant.

In addition, the SSL version includes facilities for generating RSA certificates, as well as tools to upload device and vendor certificates and keys.

The version number at the footer of each web page will have the marking “**IPBSSL**”.

⁶ SSL version 3 (with support for SSL version 2 “hello”) and TLS version 1.0

2. Fitting Batteries

The ip.buffer can run from 3 x standard AA-size Ni-MH batteries when the mains power fails (supplied without batteries). With fully charged batteries the ip.buffer should run for at least 2 hours (although this run time can be limited using the configuration options).¹

2.1.1. Battery Precautions


- **Use only AA sized rechargeable Ni-MH batteries with a capacity of at least 2000mAh.**
- Batteries should all be of the same capacity, manufacturer, and type.
- RISK OF EXPLOSION IF BATTERIES OF INCORRECT TYPE ARE FITTED.
Never use non-rechargeable batteries.
- Do not burn or puncture the batteries. The cells may explode.
- Check with local requirements for possible special disposal instructions.
- When replacing batteries all batteries should be replaced at the same time.
- Remove the batteries from the product if the product will not be used for some time (several months or more).
- Check with local requirements for shipping restrictions before shipping with batteries fitted. Some authorities strongly recommend shipping without batteries fitted!

¹ Batteries not supplied.

2.1.2. Installing in an ip.1

The battery compartment for the ip.1, which has a plastic case, is accessible beneath the cover in the lid. Undo the retaining screw and insert the batteries over the ribbon, observing polarity. The ribbon will help in the battery removal.


- Remove the power supply and all other connectors from the unit before opening the case!

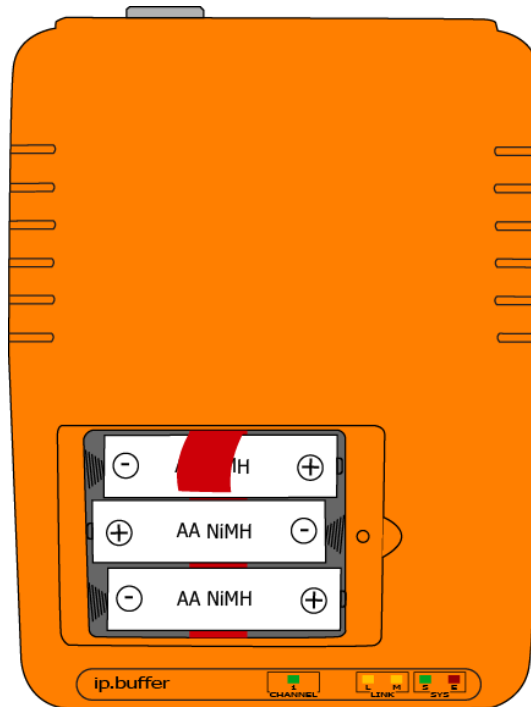

2.1.3. Installing in an ip.4

The ip.2 and ip.4 have a metal case. The case has to be opened by removing the screws on either side, and then sliding the top case section off. Inside, the battery compartment lid is fixed by one screw. Observe polarity when inserting the batteries. Take care not to damage or touch the rest of the circuit board.

● Remove the power supply and all other connectors from the unit before opening the case!

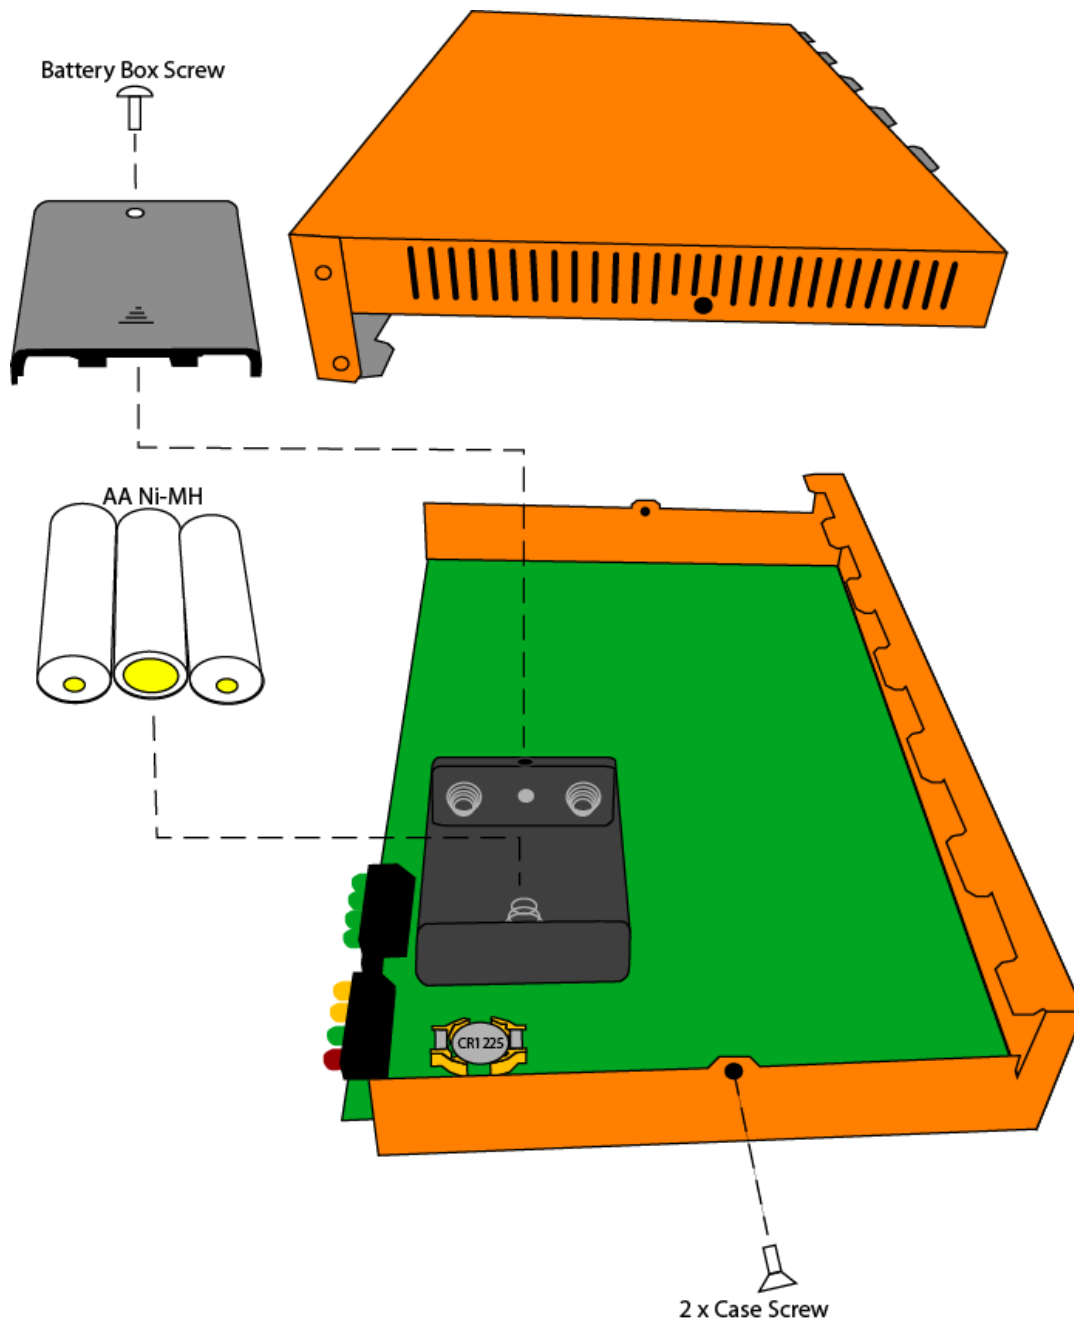

3. Physical Mounting

3.1. ip.1 – plastic box

3.1.1. DIN Rail Mounting

Fits “top-hat” DIN rail, as per DIN E0022, 35x15 or 35x7.5mm.

To fit:

- Hang the ip.buffer onto the top lip of the DIN rail
- Push the bottom of the box down onto the rail until it clicks into place

To remove:

- Push box up and unhook from the top of the DIN rail lip.

3.1.2. Wall mounting

- Mount two flat-headed screws (not supplied) that are 90mm apart in a vertical line
 - The stem should be no more than 4.5mm diameter
 - The screw head should be between 6mm and 11mm
- Leave the heads proud of the wall
 - The head should be no more than 6mm from the wall
- Slot the box onto the screws.

3.2. ip.2 & ip.4 – metal case

19” rack mounting:

- Screw the two ears onto the sides of the casing, using the 6 screws provided.
- Mount in a 1U rack position.

4. Installation

4.1. Connections

- Plug the plug-top Power Supply Unit (PSU) into an AC 100-240V mains outlet situated near the unit.
- Connect the cord from the PSU into the DC power input of the ip.buffer.
 - The green Status (S) LED should flash once a second, indicating the unit is functioning correctly.
 - The power cable can be retained:
 - Slot the cable into the recessed cable-restraint on the underside of the ip.1, or,
 - Use a cable-tie on the ip.2 & ip.4
- Connect the ip.buffer to a network hub or switch. Make sure you connect the “LAN” port, and not the “SEbus” connector!
 - The yellow Link (L) LED should light and flash in time with network traffic.
- If required, and fitted in the ip.buffer, connect the modem port to the telephone with an appropriate adapter if needed.

4.2. Getting Started

- On your PC, run the SEDiscover¹ application, and press the F5 key (or the magnifying glass). This will locate all ip.buffer (and NetBuffers) on the LAN.
 - SEDiscover will only show ip.buffer that are physically connected to the same network segment. It will not show ip.buffer that are separated by a router/gateway/firewall.
 - If you have problems locating the ip.buffer:
 - Disconnect the PC from the main network.
 - Connect a CAT5 cable directly between the PC and the ip.buffer.
 - Make sure the PC has a fixed IP address (e.g. 192.168.0.111)
 - Retry SEDiscover
- The default IP address of the ip.buffer will be **192.168.0.235**
- You can highlight the entry in SEDiscover and press the world icon to go straight to the web page of the ip.buffer²
- You should see the ip.buffer's main status page.
- The default username and password for the Setup & Tools pages are:
 - Username = “**admin**”
 - Password = “**secret**”
- You can change the ip.buffer's IP address, subnet & gateway details:
 - Through the web-page at any time (assuming you have the correct username and password!)
 - With SEDiscover if the ip.buffer has been powered up for less than 5 minutes³.

¹ You can download this from our website at www.scannex.com. SEDiscover uses a more acceptable protocol when compared with the older NBDdiscover application.

² Even if the ip.buffer is on a different subnet, the SEDiscover tool (v2.2+) inserts a temporary static route into your PC's routing table. The added routes are removed when you close SEDiscover. In addition, if you have multiple ip.buffer with the same IP address, the SEDiscover tool inserts a static ARP entry to allow direct access. Note that these facilities are not readily available when not using the SEDiscover tool.

³ If the ip.buffer has been powered up for more than 5 minutes, you can hold the front recessed button for **2 seconds only** to enable updating through SEDiscover.

4.3. **Forgotten passwords**

If the password is forgotten, there is one sure way to gain access to the ip.buffer:






● Once you have performed this action there is no way to recover any of the data or settings. Everything will be completely and utterly erased! Use this as a last resort only.


- Press and hold the button on the front of the ip.buffer for more than 10 seconds
 - The red LED will blink every second until you have held it down for 10 seconds
 - Then the red LED will blink rapidly
- Now release the button
- The ip.buffer will **erase all parameters and data** and reboot.
- When the reboot process completes the ip.buffer will be reset to factory settings.

● There is a programmable option which allows for a 5-minute access after power-up - without requiring a username and password. If this option is not enabled (*it is off by default*) then you have to resort to the wipe-everything method above.

5. Front Panel

The LEDs on the front panel show the following information:

	Channel 1..4	Off	Source not connected
		On	Source Connected
		Flashing	Data Arriving
	L: LAN	Off	No Ethernet Connection
		On	Ethernet Connected
		Flashing	Ethernet Activity
	M: Modem	Off	Modem Off-Line
		Slow Flash	Answering or Dialling
		Fast Flash	Negotiating PPP ¹
		On	Modem On-Line
	S: Status	Blinks every second to indicate the ip.buffer is functioning normally	
	E: Error	Blinks when booting. Normally off	

-  All LEDs (except the “L” LAN) will flash on, then off every 8 seconds to show that the operating system kernel is functioning. The LAN LED is controlled directly by the Ethernet circuitry.

¹ When the ip.buffer boots up, the Modem LED will flash if there is a modem present. If no modem is installed, the Modem LED will not light (except for the regular 8 second flash)

6. Status Web page

The status web page is accessible by anyone on the LAN. It provides a visual guide to the status of the ip.buffer, as well as more detailed information. Use the mouse to hover over one of the coloured cells to show detailed information - that information will appear on the right hand side of the page.

- When first loaded, the status web page will automatically refresh every 5 seconds. If you need to freeze the automatic update, click on the “stop” radio button at the bottom of the page.

6.1. Channel: Source

Green	Connected
Amber	Connected, but quiet
Red	Not connected
White	Source task not running ¹ .

- A double ended arrow ⇔ after the source name (e.g. “COM1 ⇔”) indicates that the pass-through socket is currently connected and active. Hovering over the source will show which IP address is connected².
- An asterisk * after the source name (e.g. “COM1 *”) indicates that there is Lua script processing applied to this channel.
- An infinity sign before the source name (e.g. “∞COM1”) indicates that the serial diagnostics loopback mode is enabled.

6.2. Channel: Storage

- Shows how much data is stored for the channel
- Shows when the last write occurred
- Shows how much data has been lost (if the memory has been exceeded)

- Some of the full NAND Flash storage area is reserved for firmware (4Mb), configuration settings, encryption keys, certificates, bad flash blocks, etc. Usable storage space will be approximately 5Mb less than the total. The web status screen shows the true capacity available for data storage.

¹ This can happen if the power supply is not providing a voltage within the specifications for running the ip.buffer. If the ip.buffer boots with low volts it will prevent collection and delivery until the supply reaches a suitable supply voltage. An email alert and SNMP trap are sent out in this condition. Additionally, the System Status (section 6.5) will be red and show “Power: Low volts!!”

² Your browser needs to have a suitable Unicode font installed to show the double arrow. If no suitable font exists you will probably see a small square box: □

6.3. Channel: Destination

White	Not connected
Green	Currently connected
Red	The last delivery had a problem

- For the “push” methods of delivery you can also request an immediate delivery by hovering over the destination cell which will show a “[Push Now!]” button in the detail panel.

6.4. Modem

White	Idle
Amber	Answering, Dialling, Negotiating PPP
Green	Online

- When online, shows the Local and Remote IP addresses for the PPP link.
- When the modem was last used, and what PPP state was reached (to help diagnose PPP configuration errors)
- The tasks that are requesting modem usage
- The hold off timer for the modem

6.5. System

- System

Green	System fine
Red	System error ³

- Total percentage usage of memory
- The current time

- Alerts

Green	No alerts
Amber	Alerts Pending
Red	Error sending the alert(s)

- Alerts currently active are shown when you hover over the alerts cell
- If a Log transmission is pending, then “Log” will appear in the cell.

³ e.g. low volts on power input; overfull memory

7. SETUP

Firmware version 1.60 and above use new web technologies (AJAX in particular - Asynchronous Javascript And XML) to provide a more logical setup interface. Before describing the settings that are available it is worth outlining the general design of the web interface:

7.1. Web Interface

The setup pages are built in a modular fashion. Some pages will automatically load some of the modules when you open a page. For other pages the modules will only load when you choose to examine the settings within the module.

There are two ways to view and hide a module:

1. Click on the shortcuts of the “[show](#) / [hide](#)” links to the right of the module
2. Click on the blue bar (with the orange text) on the left of the module. e.g. “**Network**”

Some pages, like the channel settings page, will dynamically fetch the appropriate module as you change the source and destination combo-box. Once a module has been fetched, it remains in the browser and does not need fetching again.

● You may notice the text “*Loading...*” appear when you open a module for the first time. When using the LAN this message will flash up briefly. However, when connected via a modem this message is visible longer - as it takes longer to fetch the module over the relatively slow PPP connection.

● All text fields allow special characters to be entered with a backslash “\” character. For example “\t” is a [TAB] character, “\r” is [CR], “\n” is [LF]. Additionally, “\xnn” will enter a two digit hex character - e.g. “\xc9”. For this reason, if you want to enter a genuine **backslash** character, enter “\\” - e.g. “let\\me\\in” is the character sequence “let\me\in”

● Default settings in the manual are shown in italic green. e.g. *[60]* denotes a default value of 60.

7.2. Global: Settings

<http://192.168.0.235/setup/settings.shtm>

The global settings are divided into several main modules.

Device Name

The device name is used for:

- Display in the status page
- Identification when using SEDiscover
- As the “from” address when sending emailed data and email alerts¹

7.2.1. Network

LAN/Ethernet

Assignment	<p>“Fixed IP” will apply the static assignments below. “DHCP” will obtain network assignments from the LAN². For static multi-homed addresses, click the “multihoming / hide” links.</p> <p style="text-align: right;"><i>[Fixed IP]</i></p>
Fixed IP	Dotted IP address. <i>[192.168.0.235]</i>
Subnet	Dotted Subnet. <i>[255.255.255.0]</i>
Gateway	Dotted Gateway address. <i>[192.168.0.1]</i>

¹ The email client will strip any illegal characters when using the name. Only “A”-“Z”, “a”-“z”, “0”-“9”, “_”, “.” and “-” are allowed. These are the characters supported by the Scannex SECollector utility.

² The DHCP Option 61 Client ID includes the Ethernet MAC address and a suffix sequence of hex characters (which uniquely identify the individual DHCP request on the ipbuffer). When assigning a permanent allocation on the DHCP server (e.g. Microsoft DHCP Server), use the full client ID string and not just the Ethernet MAC address.

Multihome IP (global)

You can assign up to two other IP addresses for the ip.buffer. This allows connection with a device that is physically on the same Ethernet network, but is not on the same IP subnet.

- The Multihome IP setting module is also available from within the TCP Source module. Effectively, a copy of the settings can be seen and edited there. Please note that the settings are **global** and apply to all channels.

2nd IP	Dotted IP address.	[blank]
2nd Subnet	Dotted Subnet.	[255.255.255.0]
3rd IP	Dotted IP address.	[blank]
3rd Subnet	Dotted Subnet.	[255.255.255.0]

For example, if the PBX has a fixed IP address of 192.0.2.3:

- 2nd IP = 192.0.2.4
- 2nd Subnet = 255.255.255.0
- The PBX should be plugged into the same hub/switch as the ip.buffer
- The ip.buffer can now connect directly to the PBX (or the PBX can access the ip.buffer on its extra address of 192.0.2.4)

- Only the primary address is visible to SEDiscover and only the primary address can use DHCP. The 2nd and 3rd IP addresses are meant for accessing devices that cannot be brought onto the LAN (e.g. they have a fixed IP address)

Name Servers

DNS 1	Dotted IP addresses for Domain Name Servers ³ . <i>[192.168.0.1]</i> The name servers can be on the LAN, or accessible via the Gateway. Typically, the gateway IP address can be used as this will proxy the DNS requests.
DNS 2	Secondary DNS server. <i>[255.255.255.255]</i>

SNMP Traps

Destination	Dotted IP address for SNMP traps. <i>[255.255.255.255]</i> “0.0.0.0” will disable SNMP trap transmission “255.255.255.255” will broadcast traps across the LAN
--------------------	--

SNMP traps are sent in SNMP v1 format. The MIB definitions for the ip.buffer and NetBuffer are available from Scannex.

SNMP Agent

Contact	A contact name, number, or email. This value is simply reported back to the SNMP agent when querying the sys information group. <i>[blank]</i>
Location	A location for this device. This value is simply reported back to the SNMP agent when querying the sys information group. <i>[blank]</i>

See section 16 for details on the complete SNMP OID values.

³ DNS name-to-IP entries are cached for a maximum of 5 minutes. The DNS server can specify a shorter time in the time-to-live field of the DNS response.

Syslog

Server	Dotted IP address or name for syslog output messages. [blank]
---------------	--

On bootup, a syslog message “**system: ip.buffer starting**” is output with facility KERNEL, severity NOTICE.

All protected GETs and POSTs to the web-server will output a syslog USER facility with NOTICE severity message in the form:

“**web: ipaddress method /url?query username**”

Where:

- **ipaddress** is the browser's IP address in dotted form. e.g. “192.168.0.235”
- **method** is either “GET” or “POST”
- **/url?query** are the url and query (if present) given for the GET or POST
- **username** is the user that performed the action (if applicable)

By tracking the syslog output it is possible to maintain a basic audit tracking log of changes made to the ip.buffer⁴.

Bandwidth Limiting

Max data	Value in kilo-bytes per second. “0” means unlimited. [0]
-----------------	--

Normally the ip.buffer will transmit stored data as fast as it can. In some circumstances this is undesirable. Setting a value other than zero will limit the transfer rate for all data deliveries across the Ethernet interface. (Deliveries across the PPP interface will be sent as fast as possible.)

⁴ Version 2.30+ stores all syslog messages in the Log, even if the syslog server entry is blank.

7.2.2. Time

The ip.buffer includes SNTP client code so it can contact a remote time server and synchronise the date and time. The server is contacted whenever the ip.buffer is booted, and whenever the daily time update is performed.

When the ip.buffer is in a remote location that has no LAN access to the Internet, the SNTP client can dial through the modem to contact a public SNTP server - keeping the date and time always up to date.

SNTP - Simple Network Time Protocol

Server	Address or IP address of an accessible SNTP server. Blank = no SNTP update performed. e.g. "time.nist.gov" [blank]
Interface	"LAN only" - will connect only using Ethernet "Modem only" - will always use PPP "LAN then Modem" - will try to use Ethernet. If that fails it will try PPP "Modem then LAN" - will try to use PPP and if that fails it will try Ethernet. <i>For the Modem dial-out setup see section 7.2.5</i> [LAN only]
Update At	The daily time, in 24hr "HHMM" format, when the SNTP should be contacted. Blank = no daily update. [0200]
Sync Now	A write-only value that forces the ip.buffer to contact the SNTP server immediately. "No" waits until the normal update time to contact the server. "Sync on save" will contact the SNTP server when you save the form (pressing the "SAVE" button) [No]
Time Zone	The time-zone offset, in hours, from GMT. You can enter positive and negative, as well as fractional hour values.
Last Update	Shows the last date and time a reply from the SNTP was received.

Daylight Saving

The daylight saving option is applied both to the reply from the SNTP server and to the internal clock. If you do not use the SNTP server, the DST options can still be used.

Daylight Saving	Sets whether Daylight Saving Adjustment is performed. "No" does not apply DST. "Adjust" Will adjust for DST. [No]
------------------------	--

DST Start

Which	Chooses which week number. “1st” first week of the month. “2nd” second week. “3rd” third week. “4th” fourth week. “Last” the last specified day in the month.
Day	The day of the week that DST should change.
Month	The month that DST should change.
Time	The time, in 24hr “HHMM” format, when DST should change.

DST End

The same entries as for “DST Start” apply.

7.2.3. Power**Battery Power**

Run Limit	Time, in minutes, before powering off when running on batteries. [60]
------------------	---

7.2.4. Modem In

If a modem is not physically present then all the web options for using the modem will disappear.

- The PPP interface only allows access to the ip.buffer itself. The ip.buffer will not work as a modem router (this protects the internal LAN from any dial-in attacks).

Global

Country	The default of “B5” should work in most countries. For specific country codes please refer to Section 20. [B5]
Initialisation	Applies extra commands after resetting the modem. [blank]
ip.buffer Address	If set to a dotted IP address, then the ip.buffer will assume this address when a computer dials in. If set to blank, then the ip.buffer will become the next IP address up from the calling computer. e.g. if the computer is 10.10.0.23, then the ip.buffer will become 10.10.0.24. [blank]

Dial-in

Answer After	The number of rings to answer in. If the line rings less than this, then a dial-in trigger is generated (and you can force delivery on individual channels). [2]
Answer Time	The maximum time (in seconds) for answering, negotiating the modem and negotiating the PPP before hanging up and aborting the incoming connection. [120]
Username	Username for incoming connections (case sensitive) [user]
Password	Password for incoming connections (case sensitive) [password]
CHAP	Specifies the authentication required for incoming connections. “PAP or CHAP” will allow either PAP (Password Authentication Protocol) which will send the username and password “in the clear” (i.e. can be eavesdropped), and CHAP (Challenge Handshake Authentication Protocol). “CHAP only” will only allow the more secure CHAP protocol. [CHAP only]
Computer Address	If the calling computer is setup to use automatic IP assignment, then this value is the address given to the computer. If the calling computer has a static IP address on its PPP interface, then this value is not used. [192.168.234.1]

7.2.5. Modem Out

If a modem is not physically present then all the web options for using the modem will not be shown.

● The ip.buffer will not dial-out during the first 5 minutes of boot-up. This allows for dial-in access. See section 7.2.4

Modem Dial-out settings (global)

Dial Type	<p>“Tone dialling” - uses DTMF tone dialling. “Pulse dialling” - uses loop disconnect dialling</p> <p style="text-align: right;"><i>[Tone dialling]</i></p>
Connect Time	<p>Maximum time (in seconds) to dial, connect, and negotiate PPP. If this time is exceeded, the ip.buffer will hangup and abort the call.</p> <p style="text-align: right;"><i>[150]</i></p>
Online max time	<p>Maximum amount of time (in minutes) to spend in one dial out connection. When this time limit is exceeded, all working delivery tasks are told to finalise their delivery and finish early. Once all the tasks have completed, the modem connection is terminated.</p> <p style="text-align: right;"><i>[15]</i></p>
Interval time	<p>Time (in seconds) to wait after hanging up the modem. This time is effective for both unsuccessful and successful connection attempts⁵.</p> <p style="text-align: right;"><i>[60]</i></p>
Retry limit	<p>Maximum number of times to dial before waiting a hold-off period.</p> <p style="text-align: right;"><i>[3]</i></p>
Hold off time	<p>Time (in minutes) to wait if tried “Retry Limit” times without managing to connect to the ISP⁶. Should be longer than the interval time.</p> <p style="text-align: right;"><i>[60]</i></p>
ISP sequence	<p>“#1 then #2 on fail” will always try ISP #1 first. ISP #2 will only be used if ISP #1 fails. “Alternate #1 & #2” will try ISP #1 and ISP #2 in turn.</p> <p style="text-align: right;"><i>[#1 then #2 on fail]</i></p>

⁵ Use a value of at least 30 seconds otherwise the internal modem may not dial.


⁶ Once a hold-off or interval period is in place, the user can clear the timer from the status web page by hovering over the “Modem” status panel and pushing the “[**Clear Timers!**]” button.

Dial-out exclusion

Between	The start time to begin exclusion.	[1800]
...and	The end time for the exclusion period.	[1900]

If the modem is used as the primary means of data delivery it may be that the modem is in use all the time (when there are very large amounts of data to send). Since the modem is also used for administration of the ip.buffer it is advantageous to allow a known “window” when you can always dial-in.

During the exclusion time period the ip.buffer will not perform any new dial-out attempts. If the modem is in use when the exclusion time comes into force, the modem manager task will request that all delivery tasks finish their work early so the modem can be hung up soon.

 Be aware that the dial-out exclusion time is based on the ip.buffer’s local clock. There may be clock-drift over periods of weeks and months. This clock drift can be eliminated by using SNTP (section 7.2.2)

ISP #1 & ISP #2

Number	The full number for the ISP	[blank]
Username	The CHAP/PAP username for the ISP	[blank]
Password	The CHAP/PAP password for the ISP	[blank]

Firewalling

When connected to an ISP the ip.buffer implements a firewall to prevent any TCP/IP connections being made to the device. It is impossible to gain access to the web server, FTP server, or any other ports while dialled up to an ISP (even if the ISP is actually a RAS server).

DNS Servers

Normally, for Ethernet LAN connections, the ip.buffer will use the DNS1 and DNS2 addresses programmed in the Network & System web page. However, for delivery destinations that use the modem the DNS requests are sent across the PPP modem link using the DNS server addresses supplied at connection by the remote PPP end⁷.

If the remote machine name is already in the DNS cache (whether obtained via the LAN or the modem) the cache entry is used.

⁷ While the PPP link is active, the LAN DNS server addresses are still used for Ethernet LAN transfers.

7.2.6. SMTP Email Servers

The ip.buffer allows two separate email servers to be programmed. For email data delivery, we **strongly** recommend sending the data “point-to-point”. That is to say, the ip.buffer should connect directly to the SMTP server that is processing the data, and it should not connect through any SMTP relays. This ensures that the data cannot be lost in transit⁸.

For the delivery of email alerts, any server could be used - whether that is a private server or a public one.

● The SMTP#1 and SMTP#2 are **global** settings - editing within one module will affect all others.


The settings for each SMTP server are:

Name	A screen name used for choosing an SMTP server. <i>[SMTP1] & [SMTP2]</i>
Interface	<p>“LAN only” - will connect only using Ethernet</p> <p>“Modem only” - will always use PPP</p> <p>“LAN then Modem” - will try to use Ethernet. If that fails it will try PPP</p> <p>“Modem then LAN” - will try to use PPP and if that fails it will try Ethernet.</p> <p><i>For the Modem dial-out setup see section 7.2.5</i> <i>[LAN only]</i></p>
Server	The name or IP address of the server ⁹ . <i>[blank]</i>
Port	The port number to connect to the server on. <i>[25]</i>
TLS/SSL	<p>“No encryption” - a plain SMTP session</p> <p>“Explicit (by command)” - starts with a plain connection and then upgrades to SSL/TLS. If the server does not support SSL/TLS then the delivery will fail.</p> <p>“Implicit (by port)” - starts with an SSL/TLS connection. <i>[No encryption]</i></p>

⁸ If using the point-to-point email delivery method across a public network we suggest using a non-standard port number. Some ISPs now filter any port 25 traffic and perform anti-spam and other checks. You can use any port (e.g. 20025), as long as the server is programmed to use the same port! For any public SMTP server, port 25 should be used for non SSL traffic.

⁹ In the case of a modem-only connection, you can use the special designator “\$” to denote the address of the other end of the PPP connection. This is helpful where the mail server machine is also a RAS/PPP server.

Domain	Domain - you need to enter a domain name (e.g. "scannex.com") that is used for the "HELO"/"EHLO" logon sequence, and for the domain part of the "from" address. The from email address for alerts will be boxname@domain, while for data deliveries it will be boxname_channelname@domain. <i>[blank]</i>
Username	Only enter a username if the server requires authentication for sending emails. Usually required if sending to someone on a domain other than the server's domain. <i>[blank]</i>
Password	(see Username above). <i>[blank]</i>
Limit	When the SMTP server is used to send data this value, in kilobytes, will break the emails into sizeable chunks. <i>[1024]</i>

 The recipient (email to) addresses are programmed individually for each channel and on the email alert setup.

7.2.7. Alerts & Log

The alert system allows the pro-active monitoring of the ip.buffer and all channels. Alerts can be sent as emails (which can be human-read or machine processed). Alternatively the alerts can be HTTP POST'd into a compliant web-server - and the web-server can decide how best to deal with the alerts (see section 17).

Alerts are generated for memory full conditions, reboots, web configuration, authentication failures, channel quiets, and channel connects/disconnects.

Each alert has a “tag” that identifies the specific alert. Along with the “tag” there is usually a text field as well.

The emails contain the tags on the subject line, as well as the alert entry in the body HTML text of the email. All notification emails may include more than one tag on the subject line (separated by a comma), and will have the “status.lua” file attached.

When using HTTP POST, the alerts are sent through as fields. Each field has the prefix “alert_”. The “tag” follows - e.g. “alert_Reboot”. The field value is always the date (in the form “YYYY-MM-DD HH:MM:SS”), a space, and the alert text. It is relatively trivial to process these alerts in web-server scripting languages like PHP¹⁰.

Method

Method	<p>“Email (SMTP)” will send alerts by email</p> <p>“HTTP POST to web server” will send alerts by the HTTP POST method.</p> <p>“Don't send alerts” will not send anything [Email (SMTP)]</p>
---------------	--

Email Server

(Only visible if Method is “Email (SMTP)”)

SMTP	<p>“SMTP #1” will send via SMTP server #1</p> <p>“SMTP #2” will send via SMTP server #2</p> <p>Click the “show / hide” to view the actual SMTP#1 and SMTP#2 programming. [SMTP#2]</p> <p>For SMTP settings see section 7.2.6</p>
email to	<p>The recipient(s) of the alert emails. Use a semicolon to separate multiple recipients.</p> <p>e.g. alerts@scannex.com;myemail@yahoo.com [blank]</p>

¹⁰ Scannex can provide sample PHP scripts and Apache setup guides, as well as Microsoft C# .NET scripts and IIS setup guides.

HTTP POST*(Only visible if Method is "HTTP POST to Web Server")*

Interface	<p>"LAN only" - will connect only using Ethernet</p> <p>"Modem only" - will always use PPP</p> <p>"LAN then Modem" - will try to use Ethernet. If that fails it will try PPP</p> <p>"Modem then LAN" - will try to use PPP and if that fails it will try Ethernet.</p> <p><i>Note: For the Modem dial-out setup see section 7.2.5</i></p> <p style="text-align: right;"><i>[LAN only]</i></p>
URL	<p>The full URL. This should be in the form "<code>http[s]://[user[:pass]@server[:port]/directory/resource</code>".</p> <p>e.g. "<code>https://192.168.0.240/private/upload.php</code>"</p> <p>e.g. "<code>https://main:pass@192.168.0.241/ipbuffer/get.asp</code>"</p> <p>e.g. "<code>http://main@192.168.0.241:8081/ipbuffer.php</code>" <i>[blank]</i></p>
Success	<p>The string to look for in the body text of an HTTP 20x response to indicate a successful transfer. If blank, then any HTTP 20x response is considered successful.</p> <p style="text-align: right;"><i>[blank]</i></p>

Memory Alerts

Global Memory	<p>Percentage level for the global memory full alert¹¹. The tag is "Full".</p> <p>0 will disable this alert. <i>[75]</i></p>
Channel n	<p>Specifies the trigger level (in megabytes) to send a channel based full alert. The tag is "Fulln".</p> <p>0 will disable the alert for the given channel. <i>[0]</i></p>

¹¹ The alert will be sent immediately the memory goes over the limit. However, repeat "Full" alerts will continue to be sent every 8 hours until the memory drops below the limit.

Notification Alerts

Comfort	Sets the interval in minutes for the transmission of an alert back to the central system to show that the ip.buffer is still running. The tag is “Comfort” . <i>[Ignore]</i>
Reboot	If enabled will send an alert when the ip.buffer is rebooted. The tag is “Reboot” . <i>[Ignore]</i>
Configure	If enabled, an alert will be sent when anyone changes the settings through the webpage ¹² . <i>[Ignore]</i>
Authentication	If enabled, all FTP server authentication failures, all pass-through authentication failures, and all TCP server authentication failures will be notified ¹³ . The tag is “Auth” . The alert text will indicate which service caused the authentication alert. <i>[Ignore]</i>

Alerts: Log

The audit log can be sent when it gets more than three-quarters full (total capacity is 32k-bytes).

Send log	“No” - don't send the log when it's getting full ¹⁴ . “Yes” - send the log when full. (Once sent, all log entries are deleted, and the log starts afresh.) <i>[No]</i>
-----------------	---

Temperature Alerts

Temperature display and alerts is only available in ip.2 and ip.4 products, and uses a small on-board thermometer chip located near the front panel, on the left side (looking at the LEDs). The internal temperature of the ip.buffer is approximately 5°C higher than the room temperature.

High	Sets the temperature high point, in integer degrees Celcius, to send out an alert and trap. 0=no alert. The tag is “TempHi” <i>[0]</i>
Low	Sets the temperature low point, in integer degrees Celcius, to send out an alert and trap. 0=no alert. The tag is “TempLo” <i>[0]</i>

¹² The first time a configuration is posted, the alert will be sent immediately. If configuration changes are performed over an extended period of time, reminder alerts will be sent every 10 minutes. If the configuration is left for more than 10 minutes the “Config” alert will clear.

¹³ There is no time-out on the authentication failures. All failures are sent immediately.

¹⁴ The log is circular - when full it will erase old entries.

Schedule for Quiet Alerts

The individual channels specify the timeout for the quiet alerts, but the schedule decides whether the alert is actually sent.

Days	Check which days to send quiet alerts. <i>[Mon, Tue, Wed, Thu, Fri, Sat, Sun]</i>
Between	The start time for the schedule ¹⁵ <i>[0000]</i>
...and	The end time for the schedule <i>[2359]</i>

Quiet Alerts

- These are duplicate entries as found in the individual channels

Channel n	The number of minutes of quiet before sending an alert. A value of “0” means disabled. <i>[0]</i>
------------------	--

Connect/Disconnect alerts

- These are duplicate entries as found in the individual channels

Channel n	“Ignore” - don’t send an alert on connect/disconnect. “Notify” - send an alert when connected or disconnected. <i>[Ignore]</i>
------------------	---

• If the alert cannot be sent, then new events will overwrite the pending ones.

¹⁵ You must enter the minutes as well as the hours. e.g. 10am should be entered as 1000; 9am can be written as 0900 or 900

7.2.8. Alert List

Alert Tag	Definition
Reboot	The ip.buffer has booted and started running code
Battery	The ip.buffer is running on battery power
Mains	The ip.buffer is running on mains power
Config	The ip.buffer has been reconfigured
LowVolts	The ip.buffer has started up running on a PSU that is too low
User	User triggered alert (i.e. clicked "Trigger User Alert!" on web page)
Auth	An authentication failure
Connect1, etc	A channel has connected
Disconnect1, etc	A channel has disconnected
Quiet1, etc	Channel has had no data (resent periodically)
Full1, etc	Channel has reached its full limit (resent every 8 hours)
Full	Global memory is full, as set in the alerts setting page (resent every 8 hours).
Comfort	ip.buffer is still alive (sent at the interval specified in the alerts setting page)
TempLo	The ip.buffer temperature is too low
TempHi	The ip.buffer temperature is too high

● Note that alerts sent by HTTP POST will be in the form "alert_tag", e.g. "alert_Reboot".

7.2.9. RADIUS

These settings allow the ip.buffer to refer back to one or two RADIUS servers for authentication of all server services. The ip.buffer uses UDP port 1812 for the RADIUS requests.

RADIUS Servers

Server 1	A dotted IP address or name for the RADIUS server. If this field is blank then RADIUS authentication is effectively disabled and only local username/passwords are used. <i>[blank]</i>
Secret 1	The shared secret for server 1 ¹⁶ <i>[blank]</i>
Port 1	The UDP port for server 1 <i>[1812]</i>
Server 2	A dotted IP address or name for the backup RADIUS server. <i>[blank]</i>
Secret 2	The shared secret for server 2 <i>[blank]</i>
Port 2	The UDP port for server 2 <i>[1812]</i>
Timeout	The timeout (in seconds) for requests to the RADIUS server(s) <i>[2]</i>
NAS-Identifier	The identifier string to send to the RADIUS server when issuing requests. Defaults to the serial number of this ip.buffer but can be programmed to anything required.
NAS-IP-Address	A dotted IP address to send back to the RADIUS when issuing requests. If the field is blank then the NAS-IP-Address field is not included in the request. This field is for complex RADIUS setups.

¹⁶ When replicating buffer settings it is not possible to transfer these secret values. The configuration file will have “*****” for each of the secrets. You must manually edit those values in the file before uploading into the target buffer.

Authentication Methods

Web	<p>Authentication option for the web-server</p> <p>“Local only” - Uses the local username/password set in the Web option.</p> <p>“RADIUS only” - Only asks the RADIUS server¹⁷.</p> <p>“RADIUS then Local on timeout” - Tries the RADIUS server(s) and falls-back to the local username/password if the server(s) time out¹⁸.</p> <p>“RADIUS and Local” - tries the RADIUS server(s) first, and then tries the local username/password if the server(s) time out or reject the username/password. <i>[Local only]</i></p>
Pass-through	<p>Authentication option for the pass-through of all channels. (See above options)</p>
FTP Server	<p>Authentication option for the FTP Server delivery of all channels. (See above options)¹⁹</p>
TCP Server	<p>Authentication option for the TCP Server delivery of all channels. (See above options)</p>

Each RADIUS request packet includes the following information:

- Username and Password (encrypted using the MD5 according to the RADIUS spec)
- NAS-Identifier - as set above
- NAS-IP-Address - optional (as above)
- NAS-Port-Id - this string value indicates which internal service is requesting the RADIUS authentication:
 - “**web**” - the web server
 - “**FTP**” - the FTP server
 - “**P1**”, “**P2**”, “**P3**”, “**P4**” - the pass-through socket for each channel
 - “**T1**”, “**T2**”, “**T3**”, “**T4**” - the TCP server delivery socket for each channel.

The RADIUS server MUST reply with a packet that includes a “Filter-Id” string value. This Filter-Id string value specifies which services the user is allowed to access on the ip.buffer. It is built from the following tags:

- **w1** - user is allowed to read all protected web pages but cannot POST changes.
- **w2** - user is allowed to read and write to the web pages

¹⁷ When rebooting, the ip.buffer will use the local username/password if the RADIUS cannot be contacted. As soon as the RADIUS server gives a reply the local username/password is never used again (until next reboot).

¹⁸ If contacting the RADIUS server times out, then every protected web-page (and section) will be slow to load in the browser.

¹⁹ *Collecting* with FTP Server is unaffected by this setting.

- **P1, P2, P3, P4** - user can access the TCP pass-through socket for channels 1, 2, 3, or 4 respectively. Any number of these tag values can be present within the Filter-Id.
- **T1, T2, T3, T4** - user can access the TCP Server delivery socket for channels 1, 2, 3, or 4 respectively. Any number of these tag values can be present within the Filter-Id string.
- **F1, F2, F3, F4** - user can access FTP Server delivery²⁰ for channel 1, 2, 3 or 4 respectively. Only one “F” value should be present within the Filter-Id string²¹.

For example, a returned Filter-Id string of “**w1F1P1P2P3P4T1T2T3T4**” will allow read-only web access, access to FTP delivery channel 1, and all pass-through and TCP server delivery channels.

As another example, the Filter-Id string “**P1P2P3P4**” will only allow access to the pass-through sockets for all channels - but not web, FTP, nor TCP server delivery.

²⁰ A RADIUS user can only access one channel's storage through the FTP server.

²¹ If there are multiple “F” values then only the first account is used.

Web

The web-browser client is forced to use the Basic authorization method for http. The secure MD5 Digest authorization of http is physically impossible to use with RADIUS. For that reason you SHOULD use an https secure session when using the web (the web server can be programmed to force https). See section 7.2.12.

When using RADIUS for web access, the web server will deliver a simple cookie to the browser. This cookie enables the server to link the user's web session with the current username/password combination. As a consequence the ip.buffer only has to contact the RADIUS server once for that session (without a cookie it would have to contact the RADIUS server for every page and resource requested by the web-browser).

- After switching authentication modes for web you may need to restart your web browser to get the new username and password in effect as it will have cached the cookies.

FTP

When FTP is linked to RADIUS then any channel that is set to deliver by "FTP Server" will be checked against RADIUS. When the user logs in the FTP server will contact the RADIUS server to determine which channel that user should access. The Filter-Id value is searched for the first "F" value - so there should only be one "F" value in the returned Filter-Id string. Consequently, if "F3" is received for a given user, then that user will log into channel 3.

Pass-through and TCP Server Delivery

When RADIUS is not used, both of these services only ask for a password. When the TCP/IP socket connects the user is shown a "Password:" prompt. However, when linked to RADIUS we need both a username and password from the client.

Hence, when either of these services is set to refer to RADIUS the end user should use the form "*user:password*" when replying to the "Password:" prompt.

- If you enter just a password, then the RADIUS client will assume a username of "ipbuffer_boxname_serviceid",
e.g. "ipbuffer_Scannex_P1" for pass-through 1.
e.g. "ipbuffer_Scannex_T3" for TCP Server channel 3.

Other considerations

Unless the RADIUS server can create a NAS-Identifier + User-Name to Filter-Id matrix then the inclusion of a user on the RADIUS server will allow access to the specified resources on all ip.buffers that refer to that RADIUS server.

The inclusion of programmable NAS-Identifier and NAS-IP-Address values should provide for enough flexibility to manage either groups of ip.buffers or individual ip.buffers at the RADIUS server. However, for some RADIUS servers, it may be that providing administrative web-access is all that is practical. This is the main reason for allowing each of the four services to choose where their authentication is taken.

7.2.10. Certificates

The certificates²² section allows options to “lock” the ip.buffer to specific servers by checking the servers' certificates. Additionally, clients can be forced to provide a client certificate for checking against a list of approved fingerprints.

The fingerprints are a mathematical “hash” of the full certificate. There are two common methods of hashing certificates - “MD5” and “SHA1”. The ip.buffer uses the stronger SHA1 fingerprint hash method. The full certificates can be very large (several kilo-bytes), whereas an SHA1 hash is 20bytes long. In the ip.buffer it is shown as 20 pairs of hex numbers.

e.g. “0c:15:fe:6e:7f:b4:cd:2c:64:18:16:8b:d5:3a:67:6e:c7:54:b8:71”

Locking an ip.buffer to a particular server certificate will prevent “man-in-the-middle” style attacks and spoofing. The ip.buffer will only connect to the genuine server.

Certificate Fingerprints

Local Fingerprint	Shows the SHA1 hash fingerprint of the ip.buffer's certificate. You can use this to check that the PC clients are actually connecting to this ip.buffer (and not being intercepted).
Approved Fingerprints	A list of SHA1 hash fingerprints for certificates that are approved by this ip.buffer. You may enter just the fingerprint on each line, or “name=fingerprint” (so you can identify the fingerprints more easily). [Blank]
Recent Fingerprints	<p>The Recent Fingerprint list shows the fingerprints of any certificates that were not listed in the Approved Fingerprints list.</p> <p>“Address” is the IP address or name that was programmed into the ip.buffer. When a client connects this field will show “(BLANK)”.</p> <p>“certificate CN” is the Common Name that is entered into the certificate on the server or client.</p> <p>You can hover the mouse over the “Approve” link to show the SHA1 fingerprint of the certificate.</p> <p>Clicking “Approve” will add the fingerprint to the Approved Fingerprints list.</p>

“Chains of trust”: Usually the server will only send a single certificate. That certificate may be signed by an approved person (e.g. Verisign etc), and a PC is able to check against a database of known certificate authorities to verify the certificate. The ip.buffer does not have a internal database of approved certificate authorities and can only verify certificates that were actually sent as part of the SSL/TLS handshake protocol. If multi-level certificates are required you should be able to load the whole certificate chain into your server.

²² SSL/TLS firmware only.

Certificate Global Options

<p>Verify Servers</p>	<p>“Ignore (allow any certificate)” - will allow any certificate. The fingerprint of any servers the ip.buffer connects to will appear in the “Recent Fingerprints” list.</p> <p>“Fingerprint must be approved” - only servers that have certificates that match the approved fingerprint list can be connected to. Any others will result in an error.</p> <p><i>[Ignore (allow any certificate)]</i></p>
<p>Verify Date</p>	<p>“Ignore” - the validity date of the certificate is not checked.</p> <p>“Must be in date” - the certificate date is checked. If out of date then an error is reported and the connection closed.</p> <p><i>[Ignore]</i></p>
<p>Verify Name</p>	<p>“Ignore” - does not check the certificate name.</p> <p>“Address and CN must match” - the address entered in the ip.buffer must match the certificate CN (Common Name) field²³.</p> <p><i>[Ignore]</i></p>
<p>Verify Clients</p>	<p>“Ignore (allow any certificate)” - will allow any certificate. The fingerprint of any clients that connect to the ip.buffer will appear in the “Recent Fingerprints” list.</p> <p>“Fingerprint must be approved” - only clients that have certificates that match the approved fingerprint list can be connected to. Any others will be rejected. In addition, if a client does not provide a certificate then the client will be rejected. The client certificate date and name are also checked according to the above two rules.</p> <p><i>[Ignore (allow any certificate)]</i></p>

²³ Only explicit common names are currently supported (e.g. “collect.scannex.com”). Wildcard common names are not supported (e.g. “*.scannex.com”)

7.2.11. FTP

The FTP server, as used for FTP server data delivery and FTP server data collection, has global settings.

FTP Server

Port	The port number for the server. 0 will disable the FTP server completely. [21]
Interface	<p>“LAN only” - dial-in PPP connections are blocked</p> <p>“Modem only” - Ethernet connections are blocked²⁴</p> <p>“LAN and Modem” - either PPP or Ethernet can be used [LAN and Modem]</p>
TLS/SSL	<p>“No Encryption” - uses plain FTP transfers</p> <p>“Explicit (by command)” - starts with a plain connection and requires the client to negotiate SSL/TLS before transferring data²⁵.</p> <p>“Implicit (by port)” - starts with SSL/TLS²⁶</p> <p>Note: Even if set to “No Encryption” the client can still request an explicit SSL/TLS connection. [No encryption]</p>

Passive Port Range

Lo	The lowest port number to use [50000]
Hi	The highest port number to use [50099]

When the FTP client request PASV (passive mode), the server will use one of the ports within this range, Lo-to-Hi. You can easily setup an inbound firewall rule if needed²⁷.

²⁴ If you are using collection with FTP Server, then do not use the “Modem Only” setting - this will prevent your device from connecting to the ip.buffer.

²⁵ Forcing “Explicit” SSL will still allow *collection* from non-SSL FTP devices.

²⁶ When forcing “Implicit” SSL, all FTP connections must use SSL - including collecting FTP devices.

²⁷ If the ip.buffer is behind a firewall, you will need to add “Services” to the firewall. The main service will be the FTP service (or specific TCP port if you use something other than 21). In addition, you should add the passive port range as services in the firewall. For all these services, tell the firewall to send the TCP traffic to the internal IP address of the ip.buffer. (Individual firewall configuration varies greatly.)

Source Users

- These are duplicate entries as found in the individual channel “Source” setting module when set to collect from FTP.

Channel n	The username for FTP collection for the channel (case sensitive). <i>[_channel1], [_channel2], etc</i>
(password)	The password for FTP collection for the channel (case sensitive). <i>[password]</i>

The username and password for each of the channels that are collecting data by FTP server.

Destination Users

- These are duplicate entries as found in the individual channel “Destination” setting module when set to deliver by FTP Server.

Channel n	The username for FTP Server for the channel (case sensitive). <i>[Channel1], [Channel2], etc</i>
(password)	The password for FTP Server for the channel (case sensitive). <i>[password]</i>

Destination Users - the username and password for each of the channels that are delivering data by FTP server.

See the documentation relating to the FTP Server delivery mode in section 10.3.

7.2.12. Web

You can set your own username and password for web-administration to prevent unauthorised modifications to the ip.buffer settings.

Web Server

Allow http	<p>“No (https only)” - force the web-browser to use https. Accessing port 80 (http) will redirect to port 443 (https).</p> <p>“Yes (http & https)” - either http or https connections can be made. The user is encouraged to use https by the use of a red banner at the top of the browser. <i>[Authenticate]</i></p>
Authorization	<p>“Digest only” - the web-browser must use MD5 digest authorization. Passwords are protected.</p> <p>“Basic & Digest” - either basic authorization (where the username and password are sent unencrypted) or digest MD5 authorization is possible. <i>[Basic & Digest]</i></p>
WebLock	<p>“Unlocked” - Scannex WebLock is not used.</p> <p>“Locked” - In cases where the username/password is not secure enough, you can lock the web pages with the Scannex authentication/encryption. In this case, the user has to enter a numerical response to a challenge before gaining timed access to the setup pages²⁸. <i>[Unlocked]</i></p>
Username	The username for setup and tools pages. <i>[admin]</i>
Password	The password for setup and tools pages. <i>[secret]</i> <i>Forgot the password? See section 4.3</i>
On reboot	<p>“Authenticate” - will always require a password.</p> <p>“5 minute window” - allows for 5 minutes grace after rebooting where no password is required. <i>[Authenticate]</i></p>
Local Passwords	<p>“visible” - passwords can be read and written.</p> <p>“Obscured” - reading passwords will only show “*****” on both the web-page and configuration downloads²⁹. <i>[Visible]</i></p>

²⁸ One example is where you need to give temporary access to a user or on-site engineer. They will need the username/password anyway, but by using the WebLock you can restrict their access to a one-time operation. They call you with the serial number and challenge, and you provide them with a 5 digit response code that is derived from the private secret (which you don't give out!)

²⁹ Version 2.20+ now store all passwords in the write-only secret-store (the same area that the Scannex encryption secrets and PKI certificates and keys are stored). When set to “Obscured” it is not possible to simply read-out the configuration and write into another buffer to replicate the settings. Before uploading the saved configuration file you must replace all “*****” values with the required passwords and secrets.

7.2.13. Updates

The Central Update System feature of the ip.buffer allows central management of all configured ip.buffers through a standard web server interface. This is particularly useful for 'Managed Services' deployments where out-bound web browsing is allowed on customer sites.

The ip.buffer issues a simple HTTP POST (either with http or https) to the server. The server can respond and deliver:


- Firmware upgrades
- Lua Script updates
- Configuration changes
- Requests for diagnostic dumps
- Time synchronisation commands
- Reboot requests.

Updates: HTTP POST

Interface	<p>“LAN only” - will connect only using Ethernet “Modem only” - will always use PPP “LAN then Modem” - will try to use Ethernet. If that fails it will try PPP “Modem then LAN” - will try to use PPP and if that fails it will try Ethernet. <i>For the Modem dial-out setup see section 7.2.5</i> <i>[LAN only]</i></p>
URL	<p>The full URL. This should be in the form “http[s]://[user[:pass]@server[:port]/directory/resource”. e.g. “https://192.168.0.240/private/update.php” e.g. “https://main:pass@192.168.0.241/ipbuffer/get.asp” e.g. “http://main@192.168.0.241:8081/ipbuffer.php” <i>[blank]</i></p>

Updates: Schedule

Days	<p>Check which days to check with the server. <i>[Mon,Tue,Wed,Thu,Fri,Sat,Sun]</i></p>
At	<p>The time to contact the central web server³⁰ <i>[0300]</i></p>

 The ip.buffer will check with the central server whenever it reboots, or when Lua reboots. An immediate check can also be performed with the “Tools / Check for Updates” link.

³⁰ You must enter the minutes as well as the hours. e.g. 10am should be entered as 1000; 9am can be written as 0900 or 900

7.3. Date and Time Synchronize

<http://192.168.0.235/setup/time.shtm>

The ip.buffer has a battery powered real time clock. The ip.buffer uses local time as its internal time (i.e. not necessarily GMT or UTC).

The web page allows very simple synchronisation with the PC clock - just click "SAVE". Alternatively you can manually enter a time:

Time	Enter a manual time in the form "yyyy-mm-dd hh:mm:ss"
-------------	---

See also section 7.2.2 for SNTP time-related settings, as well as daylight saving time settings.

7.4. Encryption Keys

<http://192.168.0.235/setup/encryptionkeys.shtm>

The encryption keys are applicable for the Scannex 40-bit encryption. Each channel has its own key³¹.

Channel 1..4	Enter a hexadecimal secret for encrypting the data
WebLock	Enter a hexadecimal secret for protecting web access. See section 7.2.12

³¹ The key is a hexadecimal string. Use a maximum of 24 characters (giving 96 bits) for any of the secret fields. Note, you can use a shorter number of characters, but it should always be an even number of digits (as hexadecimal numbers work in pairs). e.g. "0a0b4546"

8. Channels

<http://192.168.0.235/setup/channel.shtml?ch=1>

The ip.buffer has the concept of “channels” at the core. A channel consists of:

- The data source - Serial¹, TCP, UDP, FTP Server, or “off” (Section 9)
- A pass-through channel that allows bidirectional access to the source from a TCP/IP socket² (Section 9.6.13)
- A method of delivery (the destination) - Email Push, HTTP POST to Web Server, FTP Push, FTP Server, TCP Server, TCP Push, Pass-through Only (Section 10)
- Storage area - the memory (Section 11)

¹ Channel 1 uses COM1, Channel 2 uses COM2, and so on

² Each pass-through socket has a separate port number

Name	The name of the channel. [Channel1]																											
Source	<p>Where to collect data from:</p> <table border="1" data-bbox="512 338 1393 730"> <thead> <tr> <th>Type</th> <th>Description</th> <th>Section</th> </tr> </thead> <tbody> <tr> <td>COM1 Serial</td> <td>Serial port</td> <td>9.1</td> </tr> <tr> <td>TCP</td> <td>TCP/IP device</td> <td>9.2</td> </tr> <tr> <td>UDP</td> <td>UDP/IP</td> <td>9.2.1</td> </tr> <tr> <td>FTP Server</td> <td>Device FTP pushes into the ip.buffer</td> <td>9.4</td> </tr> <tr> <td>None (off)</td> <td>No source (Lua scripting can still make use of the storage for this channel)</td> <td>9.5</td> </tr> </tbody> </table> <p style="text-align: right;">[COM1], [COM2], etc</p>	Type	Description	Section	COM1 Serial	Serial port	9.1	TCP	TCP/IP device	9.2	UDP	UDP/IP	9.2.1	FTP Server	Device FTP pushes into the ip.buffer	9.4	None (off)	No source (Lua scripting can still make use of the storage for this channel)	9.5									
Type	Description	Section																										
COM1 Serial	Serial port	9.1																										
TCP	TCP/IP device	9.2																										
UDP	UDP/IP	9.2.1																										
FTP Server	Device FTP pushes into the ip.buffer	9.4																										
None (off)	No source (Lua scripting can still make use of the storage for this channel)	9.5																										
Destination	<p>How to deliver the data:</p> <table border="1" data-bbox="512 821 1393 1528"> <thead> <tr> <th>Type</th> <th>Description</th> <th>Section</th> </tr> </thead> <tbody> <tr> <td>Email push (SMTP client)</td> <td>Deliver by email</td> <td>10.1</td> </tr> <tr> <td>HTTP POST to web-server</td> <td>Deliver by HTTP or HTTPS</td> <td>10.2</td> </tr> <tr> <td>FTP server</td> <td>Computer collects data from ip.buffer with FTP</td> <td>10.3</td> </tr> <tr> <td>FTP push (client)</td> <td>ip.buffer FTP pushes into a central computer</td> <td>10.4</td> </tr> <tr> <td>TCP server (passive)</td> <td>Raw TCP/IP where computer connects to the ip.buffer</td> <td>10.5</td> </tr> <tr> <td>TCP push (active/client)</td> <td>Raw TCP/IP where ip.buffer pushes into a central computer</td> <td>10.6</td> </tr> <tr> <td>Legacy</td> <td>ip.buffer emulates legacy devices across TCP/IP or modem</td> <td>10.8</td> </tr> <tr> <td>None (Passthrough only)</td> <td>No delivery of data, just pass-through</td> <td>10.9</td> </tr> </tbody> </table> <p style="text-align: right;">[FTP server]</p>	Type	Description	Section	Email push (SMTP client)	Deliver by email	10.1	HTTP POST to web-server	Deliver by HTTP or HTTPS	10.2	FTP server	Computer collects data from ip.buffer with FTP	10.3	FTP push (client)	ip.buffer FTP pushes into a central computer	10.4	TCP server (passive)	Raw TCP/IP where computer connects to the ip.buffer	10.5	TCP push (active/client)	Raw TCP/IP where ip.buffer pushes into a central computer	10.6	Legacy	ip.buffer emulates legacy devices across TCP/IP or modem	10.8	None (Passthrough only)	No delivery of data, just pass-through	10.9
Type	Description	Section																										
Email push (SMTP client)	Deliver by email	10.1																										
HTTP POST to web-server	Deliver by HTTP or HTTPS	10.2																										
FTP server	Computer collects data from ip.buffer with FTP	10.3																										
FTP push (client)	ip.buffer FTP pushes into a central computer	10.4																										
TCP server (passive)	Raw TCP/IP where computer connects to the ip.buffer	10.5																										
TCP push (active/client)	Raw TCP/IP where ip.buffer pushes into a central computer	10.6																										
Legacy	ip.buffer emulates legacy devices across TCP/IP or modem	10.8																										
None (Passthrough only)	No delivery of data, just pass-through	10.9																										
Storage	How to handle memory for the channel. See section 11																											

The associated “Pass-through” socket can be used for engineer or administrative access to the data source. When the pass-through socket is connected the data may not be stored - this depends on the Pass-Through setting in 9.6.13.

It is also worth noting that each channel has its own method of delivering the data, so you can mix-and-match methods to suit the needs of the system as a whole.

9. Sources

9.1. COM Serial

All serial ports of the ip.buffer include full auto-pin detection, auto-baud¹ rate measurement, and auto-parity detection. You can also set the type of hardware flow control for receive and transmit.

9.1.1. Settings

Serial

Autobaud	Whether Scannex auto-baud and auto-protocol detection is enabled. [Enabled]
Baud	The baud rate, from 300 to 115200. If autobaud is enabled, this is the starting baud rate. [115200]
Protocol	The number of data bits and parity. [8N]
Rx/Tx	<p>“DTE: Rx2/Tx3” - pin 2 is receive on the DB9 connector</p> <p>“DCE: Rx3/Tx2” - pin 3 is receive on the DB9 connector</p> <p>“Auto” - uses the detect voltage on the pin² [Auto]</p>
Rx Flow	Which control lines to use to stop the device sending more data. [RTS]
On Passthrough	<p>Which control line(s) to use to indicate when the passthrough socket is connected.</p> <p>“None” - any control lines not used for Rx Flow are asserted. The Rx Flow control lines always take priority. For example, if you choose “RTS & DTR” for Rx Flow control then the passthrough setting will have no effect. [None]</p>

¹ The NetBuffer and ModemBuffer required a pause in the data after measuring the baud rate and before detecting the parity. The ip.buffer uses a different technique which means that a pause is not required.

² If the device has TTL outputs, and not standard RS232 +ve/-ve signals, you cannot use Auto. The electronics require the receive pin to go negative to detect.

Serial Transmit

Tx Flow	Which control lines to monitor when deciding whether we can send data into the device. [CTS]
Tx Size	Determines the maximum chunk size to transmit. The Tx Flow control lines are only checked before sending each chunk. If the connected device has a small input buffer and uses hardware flow control then lower this value ³ . [16]
Tx Pause	Allows insertion of an inter-byte gap on transmission. The value is measured in bits, so a value of 10 will halve the transmission speed. Use larger values to slow down the transmission into slow devices ⁴ . [0]

Serial Diagnostics

Loopback	<p>“Normal = off” - no loopback</p> <p>“Diagnostics = on” - helps diagnose COM port issues. While in loopback mode nothing is sent to the connected device and nothing is received from the device (Rx and Tx pins are effectively disconnected from the outside world)⁵. Be careful when trying to use bidirectional protocols with the diagnostic mode!⁶ [Normal = off]</p>
-----------------	--

In most cases, the automatic settings will work perfectly. However, there are a few exceptions which need to be outlined:

³ When using higher baud rates (e.g. 115200), very small values of Tx Size will cause excessive CPU load when sending very large amounts of data out of multiple COM ports and may cause the ip.buffer to reset.

⁴ The receive speed/flow is unaffected.

⁵ If Tx Flow control is enabled, this is still respected and data will not be transmitted if the connected device is signalling that it is not ok to send.


⁶ Also, when using this feature, make sure the pass-through socket is in “Stored” or “Not stored”, as both the “Monitor” and “Debug” modes will dump any data that you try and send to the source.

9.1.2. Connection to a PC serial port

If the ip.buffer is collecting data from a PC's serial port it is possible the PC will "probe" the port for mice and modems on boot-up. This is usually done at 115200 baud. If the ip.buffer is set for autobauding, it may trigger the autobaud process whenever the PC is rebooted.

It is more of a problem if the ip.buffer is being used to administer a PC device through the serial port. If the PC probes for devices on boot up it will start an autobauding process that may never complete (if the PC doesn't send data).

Disable autobauding for this special case.

 For collection of SMDR/CDR data from a PBX we strongly recommend leaving autobaud enabled. If an engineer changes any settings then the ip.buffer will quickly lock onto the correct baud rate and continue logging.

9.1.3. When using a Y-lead

If the ip.buffer is connected in parallel to another logging device the ip.buffer will see two transmit lines (one from the device being logged, and one from the other device). In this case, depending on which logging device is connected first, the ip.buffer may not be able to decide which pin to log data from⁷.

There are two solutions:

1. Cut all pins other than the ground and transmit on the cable that connects to the ip.buffer. The ip.buffer will always get it right.
2. Force the DCE/DTE of the ip.buffer. You can determine which way round it should be by temporarily unplugging the secondary device. Then force this in the Serial port's Source page. (The Rx/Tx setting.) Once you have forced the pin out, the secondary device can be reconnected.

⁷ If the ip.buffer is set to "Auto", and sees two transmit lines it will default to the standard PC pin out (a DTE).

9.2. TCP

There are two methods of connection with TCP. Either the ip.buffer behaves as a server and waits for the device to connect, or the ip.buffer connects into the device.

In addition, there are options for Match & Send (to allow for login sequences) and a regular heartbeat.

TCP/IP

Connect	<p>“ipbuffer to Device (active/client)” - the device is listening for the ip.buffer</p> <p>“Device to ipbuffer (passive/server)” - the device will connect into the ip.buffer (usually you have to program the device with the IP address of the buffer)</p> <p style="text-align: right;"><i>[Device to ipbuffer (passive/server)]</i></p>
Address	<p>For “ipbuffer to Device (active/client)” mode, this is the name or IP address of the device you wish to collect data from.</p> <p style="text-align: right;"><i>[blank]</i></p>
Allow	<p>For “Device to ipbuffer (passive/server)” mode, you choose to enter a name or IP address to specify which devices can connect.</p> <p>If this is blank then the ip.buffer will allow any device to connect.</p> <p>(Hint: start with a blank setting, get the configuration working and <i>then</i> lock it down with a value)</p> <p style="text-align: right;"><i>[blank]</i></p>
Port	<p>The port number for the TCP/IP socket</p> <p style="text-align: right;"><i>[2001], [2002], etc</i></p>

Match & Send

#1..#4	<p>The “match” of the match and send. As each match is detected in the incoming data stream its corresponding send is output. (See section 9.2.1)</p> <p style="text-align: right;"><i>[blank]</i></p>
->	<p>The “send” of the match and send. After the last match & send has been processed the source is then considered “connected”. (See section 9.2.1)</p> <p style="text-align: right;"><i>[blank]</i></p>

Heartbeat

Interval	The number of seconds between sending the heartbeat string. Zero is disabled. [0]
String	The string to send for heartbeat. (See section 9.2.1) [blank]

9.2.1. Match, Send & Heartbeat special characters

- # = CR/LF character
- \$ = NULL character, 0x00
- /nn = HEX character, e.g. /0D
- {nn...} = HEX character(s). e.g. {0D0A0A}

9.3. UDP

The ip.buffer is unique in that it allows collection of UDP data. Some devices, such as the Cisco Call Manager Express, send local data using the syslog protocol. The ip.buffer can collect this syslog data and treat it as normal data.

Allow	<p>“blank” = any incoming UDP source</p> <p>To restrict the UDP packets and limit the stored data to one particular device, enter an IP address or name. <i>[blank]</i></p>
Port	<p>The UDP/IP port number.</p> <p>1813 or 1646 = RADIUS accounting collection.</p> <p>514 = syslog service.</p> <p>162 = SNMP trap collection <i>[2001], [2002], etc</i></p>
Packet	<p>“ASCII + CR/LF” - takes the UDP packet and only stores readable characters. Appends a carriage return & line feed.</p> <p>“Length (LSB/MSB) + Binary” - stores a two byte length in little endian format, and then the binary packet data.</p> <p>“Binary” - stores just the pure, untouched, UDP packet data. <i>[Binary]</i></p>

There are special considerations for the specific ports 514 (syslog) and 162 (SNMP trap).

9.3.1. Syslog Collection

Set the port to 514 (syslog). You can only select the UDP packet type of “ASCII + CR/LF”.

9.3.2. SNMP Trap Collection

Set the port to 162 (SNMP trap). The “Packet” mode decides what is stored:

- “ASCII+CR/LF” - the SNMP trap is decoded into a single ASCII line and stored⁸. Internally the data is presented as ASCII data with 1 CR/LF. The decoded string includes the IP address of the sending device.
- “Length (LSB/MSB) + Binary” - the trap is stored as it was received with a length prefix.
- “Binary” - the trap is stored as it was received.

Additionally, a section appears for SNMP trap collection:

SNMP Query⁹

The SNMP Query mechanism provides for a method of checking that the connected device is still alive and connected. This is particularly important where the ip.buffer is collecting traps from a device that sends traps only infrequently¹⁰.

⁸ Prior to v1.63.48 only the binary modes were available for SNMP trap storage.

⁹ The SNMP Query options only appear when the port is set to 162

¹⁰ The ip.buffer does not keep track of the individual responses. It merely issues the request and collects the reply. It is up to the collecting computer to decide what action to take based on the presence or absence of the reply messages.

Addresses	<p>“blank” = no devices are queried</p> <p>Enter a list of addresses in the form “address=name” or just “address” to query. Keep multiple entries separated by a newline. e.g. “192.168.0.241=MainPBX” [blank]</p>
Time	<p>The time interval, in seconds, to query the address list. 0=don't query. [600]</p>

At the time interval the ip.buffer will transmit an SNMP GET-NEXT query to each of the devices listed in the Addresses field. It will request the sysDescr and sysUpTime fields¹¹.

If the “Packet” entry is set to “ASCII + CR/LF” then the response from the device will be decoded. Additionally, any devices named in the address list are given the name as any SNMP trap or SNMP reply is decoded:

Incoming trap from an ip.buffer:

```
192.168.0.235: Trap E:6024.1.3 192.168.0.235 enterpriseSpecific s=2
100 E:6024.1.3.1=00_02_ae_10_06_4c E:6024.1.3.2="Scannex"
```

Response from a query where a name is provided:

```
192.168.0.241="Epson Laser": GetResponse system.sysDescr.0="EPSON
Built-in 10Base-T/100Base-TX Print Server"
system.sysUpTime.0=267127311
```

Response from a query where only an IP address is provided:

```
192.168.0.242: GetResponse system.sysDescr.0="HP ETHERNET MULTI-
ENVIRONMENT,ROM none,JETDIRECT,JD128,EEPROM V.28.47,CIDATE
11/17/2004" system.sysUpTime.0=5738382
```

9.3.3. RADIUS Accounting Collection

Set the port to either 1646 (the legacy port) or 1813. The ip.buffer will then behave as a simple RADIUS accounting server. Incoming RADIUS accounting packets are authenticated against the secret, and valid packets are decoded into simple ASCII lines that can be easily processed.

Packets that do not match the ip.buffer's secret are silently discarded (according the RFC requirements).

RADIUS Accounting

Secret	The private secret for the RADIUS packets ¹² . ["secret"]
---------------	---

The packets are decoded as follows:

```
192.168.0.16: Acct #1="User" #40=1
```

The originating IP address is first, followed by “Acct”. Then each RADIUS attribute within the packet is output. The attribute number is given, not the name, followed by “=” and

¹¹ The ip.buffer requests the next OID from 1.3.6.1.2.1.1.1 and 1.3.6.1.2.1.1.3

¹² Unlike a full PC-based RADIUS server, the ip.buffer has a single secret for all clients. PC-based servers have one secret per client or group of clients.

the value. Most of the RADIUS attributes are known, and are decoded into string, integer, date/time, or IP address. Octet attributes, and unknown attributes, are decoded into an ASCII hex representation, e.g. #24=0x12345678abcdef0

9.4. FTP Server

The ip.buffer can collect data from devices that perform an FTP push into the buffer. e.g. Cisco Call Manager 5.

The files pushed into the ip.buffer are stored into the single storage area for the channel. You can choose whether to apply a marker around the file. This is especially useful in rebuilding the files at the central site (particularly if the memory wraps and you lose the beginning marker).

FTP Server

Username	The ip.buffer has a single FTP server for all activities (collection and delivery) and so you need to enter a unique username to distinguish the activity. Obviously, you will need the same username and password that is programmed into the sending device. <i>[_channel1], [_channel2], etc</i>
Password	The password. <i>[password]</i>
Timeout	A timeout (in minutes) for the FTP client. If the client does not send an FTP command within this time period the ip.buffer will disconnect the session - if the client “hangs”. “0” = disable the timeout. <i>[0]</i>
File Markers	“None” - just stores the files as-is. “Use {ftp...}” - applies the {ftp} begin and end markers “Use {ftp...}+CRLF” - applies the {ftp} begin and end markers on a separate line. <i>[Use {ftp...}]</i>

The File Markers are in the form:

```
{ftp begin, time, ip, file}
```

Where:

“time” is the date and time (local buffer time) in the form *yyyymmddhhmmss*.

“ip” is the IP address of the FTP client

“file” is the filename the client is about to push

The file’s data is then processed through the ip.buffer’s record detector (which can include further modification such as adding a date time prefix etc). At the end of the file transfer a suffix is appended to the memory store:

```
{ftp end, time, ip, file}
```

If the FTP client aborts the transfer for any reason, then the following suffix is appended instead:

```
{ftp failed, time, ip, file}
```

9.4.1. FTP Server Notes

As each channel can be configured for any form of collection, it is possible to collect data from multiple FTP clients. It is necessary to make the username for each collection and delivery channel unique so the FTP server code can determine the activity that is allowed.

Each username is exclusive - in other words, when one FTP client has successfully logged in with a username any other clients that try to use the same username will receive a “Busy” error from the FTP server when they try and log in.

(Devices like the Cisco Call Manager 5 will connect to the FTP server in the ip.buffer and remain connected permanently.)

Only the “STOR” command is supported for channels that are *collecting* by FTP. The “LIST” and “RETR” commands will result in an error code while logged in with that username.

9.5. None

The source setting “None” will disable the input channel completely.

However, the storage for that channel can still be used. For example another channel may split its data with a Lua script and store half of the data in this channel.

9.6. Common Modules

Whether collecting from Serial, TCP, UDP, or FTP Server, each channel includes a “Protocol Handler”, “Pass-through” options, and “Notification” options.

9.6.1. Protocol

Not available with UDP sources.

The protocol core in the ip.buffer provides for a flexible way of handling almost any data source or source protocol. With the exception of the Avaya RSP the included protocols just detect and pre-process data ready for storage. The Avaya RSP requires a bi-directional communication between the ip.buffer and the PBX. Practically any protocol can be added through Lua script extensions.

Protocol	<p>“ASCII lines” - processes data as lines of text, separated by carriage returns and/or line feeds.</p> <p>“Alcatel TCP/IP port 2533” - connects to the Alcatel PBX.</p> <p>“Avaya RSP” - the Avaya Reliable Session Protocol</p> <p>“Binary (full 8-bit)” - stores data “as-is”.</p> <p>“Generic Records” - receives records and sends acknowledgements for a wide variety of older devices.</p> <p>“Inter-Tel Axxess & 5000” - protocol for Inter-Tel PBXs.</p> <p>“NEC NEAX (STX/ETX) Serial” - the NEC NEAX2400 protocol over serial.</p> <p>“NEC NEAX TCP/IP” - the NEC NEAX protocol over network.</p> <p>“Nortel Meridian & Norstar” - processes data as lines of text. Detects Norstar CDR, Meridian CDR and alarm records.</p> <p>“iSDX binary” - only stores 22-byte iSDX frames that start with 0xEE 0xFF. <i>[ASCII lines]</i></p>
Time Stamp	<p>Allows the setting of a time-stamp that is applied to each record¹³. See section 9.6.12 <i>[blank]</i></p>
[Parameters]	<p>Some protocols have parameters that can be modified. The options appear beneath the Time Stamp. Note that changing the protocol will reset the parameters to default values.</p>

The individual protocol will provide the following services:

- Record presentation into Lua. When using Lua scripting for checking or filtering incoming records, the Protocol will send a complete record to Lua. Some devices send multiple lines of data (e.g. Nortel Norstar) which are best kept as a logical “Record”. This allows for simple “keep/trash” decisions on records, as well as activities such as time-stamping.
- Tagging of records. In some protocols, such as the Nortel protocol, the record is tagged with its type. This allows for easier filtering/detection/splitting of individual data types (e.g. CDR, alarm)

¹³ The time stamp option is disabled for all binary protocols (e.g. Binary and iSDX)

- Storage of complete records in memory. The internal file system keeps track of record boundaries. This enables the delivery mechanisms to send sets of complete records.

● When you change the protocol on a channel, the source is disconnected. In addition, if Lua is rebooted, then all sources will be temporarily disconnected (because each channel is using Lua to run the protocol).

9.6.2. Protocol: ASCII Lines

The ASCII line protocol reads in lines from the data source. The top bit of data (D7) is always stripped. The line handling mechanism inside the protocol engine uses the following method to detect line endings: a CR followed by any number of LF characters, or an LF character followed by any number of CR characters. It should handle all data formats - Unix, DOS, Mac etc.

Protocol Parameters

XON	<p>“None” - Send nothing to the source.</p> <p>“Send” - an XON character (0x11, DC1) is sent to the data source every 30 seconds. [None]</p>
Allow	<p>“ASCII only” - strips the high bit from the incoming data and removes all NULL characters (0x00) and control codes.</p> <p>“ASCII + codes” - strips the high bit from the incoming data but keeps NULL characters (0x00) and control codes. [ASCII only]</p>
Timeout	<p>If there is no line ending (or more precisely the first character of the next line has not been received), the timeout decides when to “finalise” the data and assume that nothing more is arriving from the source. The value is the time in milliseconds¹⁴. [1000]</p>

¹⁴ The “FTP Server” source type will override this value. The timeout is handled directly by detecting when the FTP STOR operation has been completed.

9.6.3. Protocol: Alcatel TCP/IP Port 2533

The Alcatel protocol connects to the PBX and receives CDR data on TCP/IP port 2533.

You should program the ip.buffer in the following way:

- Source type = TCP
- Connect = "ipbuffer to Device (active/client)"
- Address = *IP address of the Alcatel PBX*
- Port = 2533
- Match & Send = all fields should be blank
- Heartbeat String = blank

● It is vital that only one client connects to the Alcatel at a time! The PBX does not enforce this, so if more clients try to connect they will succeed - but CDR records will not be delivered to all clients (and the one that receives most of the records may not get 100%). Scannex have an AppNote that details ways to check the number of connections to the Alcatel.

9.6.4. Protocol: Avaya RSP

The Avaya Reliable Session Protocol enables the Avaya PBX to connect to the ip.buffer and deliver CDR data.

You should program the ip.buffer in the following way:

- Source type = TCP
- Connect = “Device to ipbuffer (passive/server)”
- Allow = blank (or can be the IP address of the Avaya PBX)
- Port = 9000 (this is the default Avaya port)¹⁵
- Match & Send = all fields should be blank
- Heartbeat String = blank

There are no Protocol Parameters for the Avaya RSP. Blocks of lines are sent from the Avaya to the ip.buffer, and when received, the ip.buffer acknowledges their receipt and feeds the individual lines through to storage.

- Although the Avaya RSP was designed for transferring data across a WAN from the PBX we strongly suggest that you site the ip.buffer directly next to the PBX to minimise any downtime across the network.
- The Avaya can send data either with the RSP or with a raw TCP socket¹⁶. If you are able, it is more efficient to use a raw TCP connection, and set the ip.buffer protocol to “ASCII lines”¹⁷.
- A multi-port ip.buffer can collect from multiple Avaya PBXs (or indeed any other IP-enabled devices)

9.6.5. Protocol: Binary (full 8-bit)

The binary protocol will simply grab the incoming data and store it. The size of the chunks are arbitrary and can be up to 2048 bytes long.

There are no parameters, and there is no option for time-stamping binary data.

All 8-bits of data are stored without any modification.

¹⁵ You can use another port, other than 9000. However, make sure that the ip.buffer port and Avaya port agree. Additionally, if collecting from multiple Avayas into an ip.2 or ip.4, make sure that each Avaya uses a different port number.

¹⁶ The “[Reliable Protocol](#)” can be set to either “Y” or “N” in the “[change ip-services](#)” section of the Avaya admin.

¹⁷ Scannex can provide further information on how the Avaya can be configured for raw TCP delivery.

9.6.6. Protocol: Generic Records

This protocol provides an easy way to collect ASCII data from a wide variety of devices.

It is subtly different to the “ASCII Lines” protocol in the following ways:

- It will always terminate the record with CR+LF sequence.
- It will throw away any “runt” records - records that do not terminate in the “Suffix” character string.
- It will only keep data between the Prefix and Suffix strings.

Protocol Parameters

Allow	<p>“ASCII only” - strips the high bit from the incoming data and removes all NULL characters (0x00) and control codes¹⁸.</p> <p>“ASCII + codes” - strips the high bit from the incoming data but keeps NULL characters (0x00) and control codes.</p> <p style="text-align: right;"><i>[ASCII only]</i></p>
Type	<p>“Lua Pattern” - The Prefix and Suffix are both interpreted as Lua string patterns. This allows for very complex record boundaries.</p> <p>“String Literal” - Treats Prefix and Suffix as literal strings (i.e. not Lua patterns).</p> <p style="text-align: right;"><i>[String Literal]</i></p>
Prefix	<p>The string or Lua pattern that denotes the beginning of a record (if applicable).</p> <p style="text-align: right;"><i>[blank]</i></p>
Suffix	<p>The string or Lua pattern that denotes the end of a record. If left blank then the protocol will look for either CR or LF characters.</p> <p style="text-align: right;"><i>[blank]</i></p>
ACK	<p>The string to send back to the device. Some devices require a positive acknowledgement from the ip.buffer. The Source must be a bidirectional device to allow this (i.e. COM or TCP)</p> <p style="text-align: right;"><i>[blank]</i></p>
Timeout	<p>If there is no line ending suffix received the timeout decides when to throw away the partial data received.</p> <p style="text-align: right;"><i>[1000]</i></p>

¹⁸ If the extracted record contains CR and LF characters these will be stripped from the record as control characters. If you have a multi-line record then you should choose “ASCII + codes”

This protocol can handle, amongst others, the following PBXs:

PBX Name	Type	Prefix	Suffix	ACK
Coral Isis	String Literal	%	\$	[blank]
NEC NEAX serial ¹⁹	String Literal	\x02	\x03	[blank]
Nitsuko ²⁰	String Literal	[blank]	[blank]	[blank]
Tenovis (Bosch/Telenorma)	String Literal	\x02	\x03	\x06

9.6.7. Protocol: Inter-Tel Axxess & 5000

This simple protocol is for connecting with TCP/IP to an Inter-Tel PBX. It provides the necessary sign on process to get the CDR records out of the PBX²¹.

The Inter-Tel protocol allows for the connecting client to advertise an “application” name. The ip.buffer declares itself as “ip.buffer-00-02-ae-xx-xx-xx” (where xx-xx-xx is the serial number).

Protocol Parameters

Password	If the PBX requires a password, enter it here. [blank]
-----------------	---

9.6.8. Protocol: NEC (STX/ETX) Serial

This protocol is for the serial-connected NEC PBX where each chunk of data is enclosed in 0x02...0x03 binary characters. All other data is discarded²².

A CR+LF sequence is automatically appended to each frame that is received (because the NEC does not use CR/LF characters but the ETX character).

Data is tagged as “**cdr nec**”.

Protocol Parameters

Save As	<p>“Text Lines” - removes the STX & ETX characters and saves the CDR records as normal lines of text with a CR/LF.</p> <p>“Raw (STX..ETX)” - keeps the NEC format with STX (0x02) and ETX (0x03) characters²³.</p> <p style="text-align: right;">[Text Lines]</p>
----------------	--

¹⁹ The ip.buffer includes a specific NEC NEAX protocol handler. The NEC is shown here for completeness.

²⁰ The Nitsuko outputs an LF as a line ending. The Generic Records protocol will detect this and effectively convert to CR+LF line ending.

²¹ Although you can use the Match/Send fields to do the same thing, this protocol provides a convenient way of connecting to the Inter-Tel.

²² The NEC NEAX protocol can also be handled in the “Generic Records” protocol.

²³ Be careful if using the Time Stamp feature with the Raw format - your software may not like the mix of text and NEC records!

<p>Characters</p>	<p>“ASCII only” - strips the high bit from the incoming data and removes all control characters.</p> <p>“ASCII + codes” - strips the high bit from the incoming data but keeps control characters.</p> <p style="text-align: right;"><i>[ASCII only]</i></p>
--------------------------	--

9.6.9. Protocol: NEC NEAX TCP/IP

The NEC NEAX TCP/IP protocol will connect to a variety of NEC PBXs (including IVS, IPS, IPX, SV8300, SV8500, and SV7000) and collect CDR data.

The NEC protocol includes options for Device ID and parity. The ip.buffer protocol uses techniques to automatically discover both the parity and Device ID so that installation should be simple!

By default the NEC is listening on TCP port 60010. Consequently you should program the ip.buffer in the following way:

- Source type = TCP
- Connect = “ipbuffer to Device (active/client)”
- Address = IP address of the NEC
- Port = 60010 (this is the default NEAX port)²⁴
- Match & Send = all fields should be blank
- Heartbeat String = blank

Protocol Parameters

Interval	The time interval, in seconds, to probe the NEC for new data ²⁵ . [5]
Save As	“Text Lines” - removes the STX & ETX characters and saves the CDR records as normal lines of text with a CR/LF. “Raw (STX..ETX)” - keeps the NEC format with STX (0x02) and ETX (0x03) characters ²⁶ . [Text Lines]

²⁴ If the NEC has been programmed to listen on another TCP port then you should enter the same port number in the ip.buffer.

²⁵ You should use an interval less than 120 seconds. If the NEC hears nothing from the ip.buffer for two minutes then it will terminate the connection.

²⁶ Be careful if using the Time Stamp feature with the Raw format - your software may not like the mix of text and NEC records!

9.6.10. Protocol: Nortel Meridian & Norstar

The “Nortel Meridian & Norstar” protocol is based on the “ASCII lines” protocol. However, it is also aware of the record formats of Meridian and Norstar.

Protocol Parameters

Allow	<p>“ASCII only” - strips the high bit from the incoming data and removes all NULL characters (0x00) and control codes.²⁷</p> <p>“ASCII + NULLS + codes” - strips the high bit from the incoming data but keeps NULL characters (0x00) and control codes.²⁸ [ASCII only]</p>
Timeout	<p>If there is no line ending (or more precisely the first character of the next line has not been received), the timeout decides when to “finalise” the data and assume that nothing more is arriving from the source. The value is the time in milliseconds²⁹. [1000]</p>

The high bit is stripped for ASCII data. The Nortel Meridian will often send data with D7 set³⁰. The protocol automatically strips the bit so that only pure ASCII is stored.

The protocol detects in the following way:

8 dashes at the beginning of a line	This denotes the start of a Norstar record. All lines up to the next 8 dashes are assembled together and stored as one “ cdr norstar ” tagged record.
uppercase letter + space + number	This is taken as a Meridian CDR record. Any following lines that begin with “Space + &” are assembled together and stored as one “ cdr meridian ” tagged record.
3 or 4 uppercase letters + 3 numbers + space	This is taken as a Meridian alarm record. It is stored as an “ alarm meridian ” tagged record.
All others	Passed as a single line, tagged as “ ascii ”.

²⁷ Except for TAB (0x09), CR (0x0d), and LF (0x0a)

²⁸ For example, if you rely on the NULL 0x00 byte sent within the Nortel Meridian PBX, then you should set the “Nortel Meridian & Norstar” (or “ASCII lines”) protocol parameter to “ASCII + NULLS + codes”. If your software is confused by the NULL, then use “ASCII only”. Note: Hyperterminal strips the NULLs anyway.

²⁹ The “FTP Server” source type will override this value. The timeout is handled directly by detecting when the FTP STOR operation has been completed.

³⁰ Urban legend says that the Meridian sends in 7-bit Mark parity. This is not the case. The Meridian sets D7 when it is talking to a computer, and clears the bit when it is talking to a human via a terminal. In all cases, the Meridian UART is set to 8-bit no parity, but the setting of D7 makes it appear like 7-bit mark. Nortel references can be provided.

9.6.11. Protocol: iSDX binary

The “iSDX binary” protocol will wait for the initial 0xEE and 0xFF characters of the iSDX binary format and then collect the rest of the 22-byte frame.

All other data is discarded.

Protocol Parameters

Format	“ Pure Binary ” - Stores the data “as-is”. No time stamping is performed. “ ASCII Hex ” - converts the 22-byte binary data into human readable ASCII hex with a CR/LF at the end. Time stamping is performed. <i>[Pure Binary]</i>
---------------	--

9.6.12. Time Stamping

ASCII based protocols include a field for specifying a date-time format string to prefix every record when in ASCII mode. Any text can be inserted, along with the following special tokens:

Token	Result	Example
%a	Abbreviated weekday name.	Thu
%A	Full weekday name.	Thursday
%b	Abbreviated month name.	Jan
%B	Full month name.	January
%c	Date and time.	Thu Aug 23 15:17:02 2007
%d	Day of the month (01-31)	23
%H	Hour using 24-hour format (00-23)	15
%I	Hour using 12-hour format (1-12)	3
%j	Day of the year 001-366	235
%m	Month (01-12)	06
%M	Minute (00-59)	17
%p	'am' or 'pm'	PM
%S	Second (00-59)	02
%U	Week number, starting from the first Sunday (00-53)	33
%W	Week number, starting from the first Monday (00-53)	34
%w	Day of the week number. Sunday = 0	4
%X	Time	15:17:02
%y	Year as 2-digit decimal.	07
%Y	Year as 4-digit decimal.	2007
%%	Literal “%” character	
date ³¹	Date tag in the format “{d YYYYMMDD}”	{d 20070621}
time ³²	Date and time tag in format “{t YYYYMMDDhhmmss}”	{t 20070621151702}
\n	Line Feed / Newline character	
\r	Carriage Return character	

³¹ Must appear on its own - “date”

³² Must appear on its own - “time”

<u>Token</u>	<u>Result</u>	<u>Example</u>
\t	Tab character	
\\	Literal “\” character	
\b	Backspace character	
\xnn	Hex characters, e.g. “\x01\x7e”	

Examples:

<u>Prefix</u>	<u>Description</u>	<u>Example Output</u>
%m/%d %H:%M	Month, Day, Hour, Minute	06/23 15:21
%y-%m-%d	Year-Month-Day	07-06-23
[Date %y-%m-%d]	As above but with literals	[Date 07-06-23]

● Only full records are prefixed. If you require every ASCII line to be stamped, then use the “ASCII line” protocol.

9.6.13. Pass-through

The pass-through connection is not available when collecting from UDP or FTP Server.

Port	The TCP/IP port that will listen for an incoming connection for passthrough. 0 = disable passthrough. [0]
Interface	“LAN only” - dial-in PPP connections are blocked “Modem only” - Ethernet connections are blocked “LAN and Modem” - either PPP or Ethernet can be used [LAN and Modem]
Allow	“blank” will allow any client to connect to the ip.buffer for passthrough on this channel. Enter an IP address or name to restrict inbound access to only that LAN address ³³ . [blank]
Client Type	“Auto” - if the client software negotiates Telnet options then we send back further Telnet options. “Telnet” - The ip.buffer sends Telnet options when the client connects. This is necessary when a Linux telnet command is used to connect to a non-standard port. “Raw TCP/IP” - No Telnet options. Every byte is transferred without modification between source and pass-through. [Auto]
Prompt	The prompt message for when a password is required ³⁴ . [Password:]
Password	A simple password string. When the client connects to the passthrough TCP/IP socket they will be asked for the password ³⁵ . When a successful password is entered, the ip.buffer will send back “OK” (CR/LF) to the client. “blank” = no password checking [password]
Success	The string to send when the password is successfully entered. [OK\r\n]

³³ When dialling in with a modem the “Allow” address is ignored.

³⁴ If you want to *always* send the prompt, even if the password entry is blank, then prefix the string with an exclamation mark “!”.


³⁵ Only a single CR is required to finalise the password entry. If the client sends CR + LF, then the single LF will be consumed (ignored).

Mode	<p>“Not Stored” - When connected, the pass-through has exclusive access to the source port. Nothing received from the source is stored.</p> <p>“Stored” - When connected, the pass-through can read and write to the source port (and the channel's protocol is prevented from writing to the source port). All data from the source is passed through to the protocol section for storage.</p> <p>“Monitor” - the pass-through is read-only. Additionally the pass-through socket can be connected even when the source is not connected.</p> <p>“Debug” - The pass-through is read-only and presents debugging information in a packetised format (for use with a PC application to show the data between source and protocol).</p> <p style="text-align: right;"><i>[Not stored]</i></p>
-------------	---


While connected, a double arrow ⇔ will appear after the source name in the web status page. (e.g. “COM1 ⇔”)³⁶

³⁶ Your browser needs to have a suitable Unicode font installed to show the double arrow. If no suitable font exists you will probably see a small square box: □


Pass-through Mode Diagrams

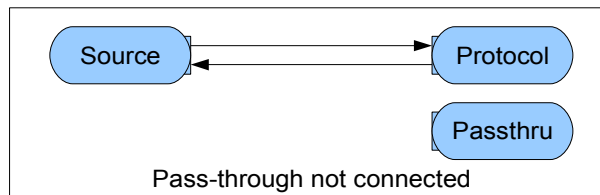


The pass-through socket is not connected. The protocol has full read/write access to the source. Data that is received on the source is processed and stored normally.

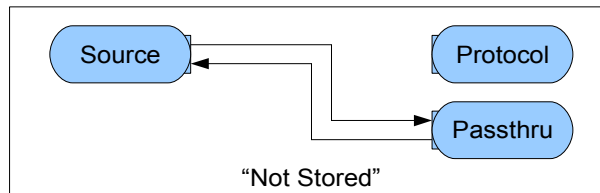

When connected, the pass-through socket has full access to the source. Since the protocol does not “see” any received data from the source, nothing is processed and stored while the pass-through socket is connected³⁷.

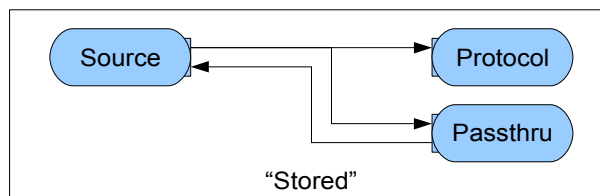

When connected, the pass-through socket has full access to the source. The protocol and storage will still store all data arriving at the source, even when the pass-through socket is connected³⁸.

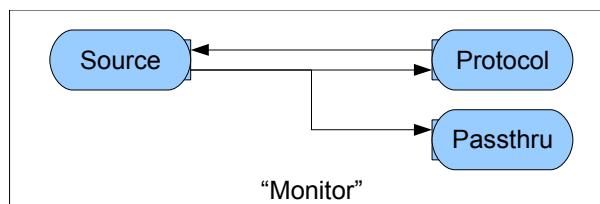

When connected, the pass-through socket will show all data arriving at the source. However, the pass-through socket cannot write any data to the source. The protocol, and storage, has full access to the source³⁹.

“Debug” mode is similar to “Monitor” except that encoded data, and event information, is sent to the pass-through socket. The pass-through socket still cannot write data to the source.

³⁷ Protocols that are bidirectional packet based, like the Avaya RSP, will prohibit this mode.

³⁸ Protocols that are bidirectional packet based, like the Avaya RSP, will prohibit this mode.

³⁹ For non-bidirectional sources, like FTP Server and UDP, this is the only available mode.

9.6.14. Notification

Each channel can send an alert (either by email or HTTP POST). There are two options for each channel's data source:

Quiet	The number of minutes of quiet ⁴⁰ before sending an alert. When the passthrough is connected (section 9.6.13), the ip.buffer will not "see" any data to stop the quiet alert. "0" will disable the notification. [0]
Connects	"Ignore" - do nothing "Notify" - send an alert when the channel connects ⁴¹ and disconnects. [Ignore]

⁴⁰ Once a channel has become quiet, the alert system will send regular quiet alerts at that interval. The alert system has a schedule to decide when to send these quiet alerts. See section 7.2.7

⁴¹ In the case of a TCP source that includes "Match/Send" fields, the channel is considered connected when the Match/Send process completes successfully. See section 9.2

10. Destinations

- There are also common options for each destination type that are detailed in section 10.10

10.1. Email push (SMTP client)

The email client in the ip.buffer will send channel data directly to an SMTP server. You can choose to send the data in compressed, and/or encrypted form, and decide on the filename and extension.

The emails themselves are split into three parts:

1. Body. This includes basic information, in HTML format, about the ip.buffer.
2. Status attachment, “status.lua”. This is the complete Lua variable tree for the status. This contains detailed information about the status for every channel and the ip.buffer itself¹.
3. Data attachment. The actual filename and format is decided by the setup.

email to	The address(es) of recipients. You can separate multiple email address with a semicolon. e.g. “datacentre@scannex.co.uk;backup@scannex.com” <i>[blank]</i>
Filename	The filename for the data file. Special tags are allowed - “%Q” for the 8-digit-hex, “%D” for date in the form “YYYYMMDD”, and “%T” for time in the form “HHMMSS”. Other tags are allowed as detailed in section 9.6.12 <i>[channel1.dat], [channel2.dat], etc</i>
Compression	“none” - send the data “as-is” “zlib deflate” - compress with zlib deflate. The file suffix “.zlib” will be added to the data filename. If the file is encrypted it must be decrypted before being decompressed. <i>[none]</i>
Server	Choose which SMTP server to send the data via. Use the “ show / hide ” links to edit the global SMTP server settings. See section 7.2.6 for server settings and data limits. <i>[SMTP #1]</i>

¹ The internal Lua variable tree also includes other non-sensitive information.

10.2. HTTP POST to web server

The ip.buffer can push data to a compliant web server - either as a standard HTTP POST or an encrypted HTTPS POST (with the SSL firmware). The web server must be fully HTTP/1.1 compliant, supporting “chunked POST”. Apache version 2, and Microsoft IIS+ASP.NET are compliant. Other servers may be.

Interface	<p>“LAN only” - will connect only using Ethernet “Modem only” - will always use PPP “LAN then Modem” - will try to use Ethernet. If that fails it will try PPP “Modem then LAN” - will try to use PPP and if that fails it will try Ethernet. <i>Note: For the Modem dial-out setup see section 7.2.5</i></p> <p style="text-align: right;"><i>[LAN only]</i></p>
URL	<p>The full URL. This should be in the form “http[s]://[user[:pass]@server/directory/resource]”. e.g. “https://192.168.0.240/private/upload.php” e.g. “https://main:pass@192.168.0.241/cdr/post.ashx” <i>[blank]</i></p>
Success	<p>The string to look for in the body text of an HTTP 20x response to indicate a successful transfer. If blank, then any HTTP 20x response is considered successful.</p> <p style="text-align: right;"><i>[blank]</i></p>
Filename	<p>The filename for the data file. Special tags are allowed - “%Q” for the 8-digit-hex, “%D” for date in the form “YYYYMMDD”, and “%T” for time in the form “HHMMSS”. Other tags are allowed as detailed in section 9.6.12</p> <p style="text-align: right;"><i>[channel1.dat], [channel2.dat], etc</i></p>
Compression	<p>“none” - send the data “as-is”, uncompressed. “zlib deflate” - compress with zlib deflate. The file suffix “.zlib” will be added to the data filename.</p> <p style="text-align: right;"><i>[none]</i></p>
Limit	<p>Sets the maximum amount of data, in kbytes, that will be transferred in one session. When the limit is reached the ip.buffer will stop at the next whole record in the storage. A value of zero means no limit.</p> <p style="text-align: right;"><i>[256]</i></p>
Send Info	<p>Whether to send the information attachment along with the data. Note that enabling the info will add about 8k to each transfer of data. Disable the info if sending in near real-time.</p> <p style="text-align: right;"><i>[no]</i></p>

See section 17 for details on handling the HTTP POST at the web server.

10.3. FTP Server

Username	The FTP server separates each channel with a different username. When the FTP client software connects to the ip.buffer it will see only this channel's file in the directory. <i>[Channel1], [Channel2], etc</i>
Password	The associated password ² . <i>[password]</i>
Filename	The filename for the channel. <i>[channel1.dat], [channel2.dat], etc</i>
Compression	"none" - send the data "as-is", uncompressed ³ . "zlib deflate" - compress with zlib deflate. The file suffix ".zlib" will be added to the data filename. <i>[none]</i>
Limit	Sets the maximum amount of data that will be transferred in one session. When the limit is reached the ip.buffer will stop at the next whole record in the storage. <i>[0]</i>
Autodelete	"No" - the client must delete the data. "Delete after download" - as soon as the ip.buffer sees that the file has been successfully downloaded it will erase the stored data. <i>[No]</i>

● Even if data is collected while logged into the FTP server, that data is not immediately visible to the FTP client, and the client cannot delete that new data. Issuing a "LIST" command (aka DIR) will "refreeze" the new data and make it visible.

Only one FTP client is supported per channel. In other words, all channels can connect at the same time, but two clients cannot connect into one channel - the FTP server will tell the second client that it is busy.

(The same applies for channels that are configured to *collect* by FTP server. Each channel can be used by only one FTP client device at a time.)

² Both username and password are **case sensitive!**

³ If the channel is programmed to provide the file uncompressed, the FTP client can decide whether to retrieve an uncompressed or compressed version. By requesting the filename with ".zlib" it will obtain a compressed version. See www.zlib.net for more details on the *zlib deflate* method.

10.3.1. Supported FTP server commands

● The following commands are the native commands that are sent between the FTP client and server. The Windows command line tool FTP uses different commands for the user. e.g. the user types “DIR”, but the FTP command line tool actually sends “LIST” to the server.

- USER** selects the username⁴. The usernames are *case sensitive*.
- PASS** send the password for the username. Incorrect usernames and/or passwords will generate an email authentication alert (if enabled).⁵
- LIST** obtain a directory listing. This will show the file and its uncompressed file size. Each time the directory listing is retrieved, the channel is “frozen”. The correct action for a client is: connect, USER, PASS, LIST⁶, RETR, DELE, QUIT.
- RETR** Retrieve the file. Normally you RETR the filename that appeared in the LIST command. However, you can choose to download a zlib compressed version by appending “.zlib” to the filename. All other extensions are ignored.
- STOR** This command is only available for channels that are configured to collect from FTP server. The RETR, LIST, and DELE commands are not possible when logged into a username that is designated for collection.
- APPE** See STOR above for restrictions. The FTP tag will show a “+” before the filename.
- DELE** Delete the data. If the FTP client has not issued a RETR, then this command will delete *all* data that was frozen (i.e. not new data that has been stored since logging in). If the FTP client has issued a RETR, then this command will only delete what has been transferred to the client.
- PORT** tells the server where to connect to send the data or directory.
- PASV** asks the server to open a listening socket so the client can connect to get the data or directory.
- LIMIT** This is a non-standard command that allows the client to set a limit for the transfer of data. This is particularly useful when downloading large files across a modem link, you can decide to download in 1Mbyte chunks. Provide the number of Kbytes to limit by, e.g. “LIMIT 1024”.⁷
- QUIT** Close the FTP connection.
- HELP** Obtain help - the list of supported commands.

⁴ This is the channel name (as mentioned in section 8)

⁵ The username and password supplied are *case sensitive*.

⁶ The LIST command is optional. The act of completing a login will automatically “freeze” the channel’s storage file.

⁷ In the standard FTP command line software in Windows, you can type “QUOTE LIMIT 1024” to send the command directly to the ip.buffer.

10.4. FTP Push (client)

The ip.buffer can initiate an FTP transfer into a central FTP server. All FTP transfers require two sockets - one for the command socket, and one for the data. The FTP transfer in the FTP push delivery method uses the secure passive transfer for data⁸.

Interface	<p>“LAN only” - will connect only using Ethernet “Modem only” - will always use PPP “LAN then Modem” - will try to use Ethernet. If that fails it will try PPP “Modem then LAN” - will try to use PPP and if that fails it will try Ethernet. <i>Note: For the Modem dial-out setup see section 7.2.5</i></p> <p style="text-align: right;"><i>[LAN only]</i></p>
Address	The IP address or name for the FTP server that the ip.buffer will connect to. ⁹ <i>[blank]</i>
Port	The TCP/IP port to start communicating with the FTP server. <i>[21]</i>
TLS/SSL	<p>“No encryption” - a plain FTP session “Explicit (by command)” - starts with a plain connection and then upgrades to SSL/TLS. If the server does not support SSL/TLS then the delivery will fail. Data transfers will be SSL/TLS as well. “Implicit (by port)” - starts with an SSL/TLS connection. Data transfers will be SSL/TLS as well. <i>[No encryption]</i></p>
Username	The username to log in. <i>[username]</i>
Password	The password to log in. <i>[password]</i>
Directory	The name of an existing directory ¹⁰ on the FTP server. e.g. “/data/sitestore/” <i>[blank]</i>
Command	<p>“Overwrite” - Sends the file to the server with an create/overwrite instruction - the “STOR” command. “Append” - Send the file to the server with a create/append instruction - the “APPE” command. See section 10.4.1 <i>[Overwrite]</i></p>

⁸ The FTP push client, the ip.buffer, requests the server to perform a PASV transfer. The server then tells the client where to connect to and the client actively opens the data socket to the given address. This means the ip.buffer can sit behind a firewall and still gain access to the FTP server. It is secure inasmuch as the ip.buffer does not need to open a listening socket that could be hijacked by an attacker.

⁹ In the case of a modem-only connection, you can use the special designator “\$” to denote the address of the other end of the PPP connection. This is helpful where the central FTP server machine is also a RAS/PPP server.

¹⁰ The directory must already exist on the server. The ip.buffer never attempts to create a directory on the server.

Filename	The filename for the data file. Special tags are allowed - “%Q” for the 8-digit-hex, “%D” for date in the form “YYYYMMDD”, and “%T” for time in the form “HHMMSS”. Other tags are allowed as detailed in section 9.6.12 <i>[channel1.dat], [channel2.dat], etc</i>
Compression	“none” - send the data “as-is”, uncompressed ¹¹ . “zlib deflate” - compress with zlib deflate. The file suffix “.zlib” will be added to the data filename ¹² . <i>[none]</i>
Limit	Sets the maximum amount of data that will be transferred in one session. When the limit is reached the ip.buffer will stop at the next whole record in the storage. A value of zero means no limit. <i>[0]</i>
Info Filename	After pushing the data the ip.buffer can also push (STOR) the information set (i.e. the Lua “i.*” tree). Special tags are supported (as in “Filename”). Blank = don't send. <i>[Blank]</i>
Event Filename	After pushing the data (and info file) the ip.buffer can also push (APPE) a single comma separated ASCII line into a file. ¹³ The CSV will contain: “Date&Time, Device Name, Serial Number, Channel Name, Filename, Sequence#, Bytes”. Special tags are supported (as in “Filename”). Blank = don't send. ¹⁴ <i>[Blank]</i>

¹¹ If the channel is programmed to provide the file uncompressed, the FTP client can decide whether to retrieve an uncompressed or compressed version. By requesting the filename with “.zlib” it will obtain a compressed version. See www.zlib.net for more details on the *zlib deflate* method.

¹² If you combine the zlib option with the FTP Command “Append” then make sure the software at the PC can handle multiple zlib streams in one file!

¹³ If there is an error sending either the info or the event file then the **whole** transfer is considered a failure - data will not be deleted and re-delivery will be attempted.

¹⁴ The user account on the FTP server must have APPEND rights selected for this to function.

10.4.1. Overwrite and Append

Data is only deleted from the ip.buffer when the transfer completes successfully. If the push fails and the ip.buffer reattempts delivery, it will transfer the file again.

When using the “Overwrite” command the ip.buffer will overwrite any existing file on the server. In this mode it is suggested to use the “8-digit-hex” suffix to avoid any possible duplication of data (where the server has a partial transfer plus a complete transfer of the same information from the ip.buffer's reattempt). For example, if the ip.buffer begins transferring “channel1.dat.00001234” and the transfer fails, the ip.buffer will attempt the delivery of “channel1.dat.00001234” again the next time. The 8-digit-hex number is only incremented on a successful delivery.

If you use the “Date & time” suffix then the ip.buffer will use the *current* date and time at the time of pushing - meaning that a failed transfer will be repeated with a different time. So, a transfer may begin with “channel1.dat.20080318152300” and fail, but the next delivery (which includes the same data again) might be “channel1.dat.20080318152415” and you will be unable to determine which are completed transfers (unless the FTP server cleans up on a failure - which most do not!).

When using the “Append” command there is no easy way to determine when there has been a failed transfer. Unless the FTP server can “unwind” the data on a failure, you should use the “Overwrite” command instead. However, it is possible to make use of the Data Markers - the prefix and suffix - to create markers that indicate a transfer was started and completed successfully. But your application software has to handle this separately. See section 10.10.1 for Data Markers.

10.5. TCP Server (passive)

The TCP server option allows for a simple client to connect to a listening socket in the ip.buffer and pull the data out of the ip.buffer. The data is transferred “as-is” with no protocol.

Port	The TCP/IP port to listen on. This port must be a unique number within the ip.buffer (i.e. you cannot have two channels listening on the same port number) [5001]
Interface	<p>“LAN only” - allows incoming connections only from Ethernet. PPP will not connect.</p> <p>“Modem only” - allows incoming connections only from PPP. Ethernet will not connect.</p> <p>“LAN or Modem” - allows incoming connection from either PPP or Ethernet. [LAN or Modem]</p>
Allow	<p>You can enter a single name or IP address to restrict access to the TCP server for devices on the LAN¹⁵. Any non-matching clients will have their connection closed before any data is sent.</p> <p>(Hint: leave this blank until you have the system working, and then secure it with a value) [blank]</p>
TLS/SSL	<p>“No encryption” - a plain TCP/IP session</p> <p>“Implicit (by port)” - starts with an SSL/TLS connection. A client that connects with plain TCP/IP will time out and be disconnected. [No encryption]</p>
Password	<p>If this is non-blank the ip.buffer will show a simple “Password:” prompt when the client connects. If the client does not enter the correct password in time, the message “Failed” is output, the connection will be closed and an email authentication alert generated (if enabled - section 7.2.7)¹⁶ [password]</p>
On Complete	<p>“Disconnect (one-shot)” - when the client connects the ip.buffer will “freeze” the data, send only that data, wait 3 seconds then close the socket. The client will see the server close the connection indicating that the transfer was complete. Data is deleted only when the complete amount has been sent.</p> <p>“Stay connected (real-time)” - data is sent in 32k chunks to the computer. The data is deleted from the store as it progresses. [Stay connected (real-time)]</p>

¹⁵ When dialling in with a modem the “Allow” address is ignored.

¹⁶ By default, when a correct password is entered, nothing is sent to the client (except the data itself). In some cases it is preferably to have an “OK” message, or similar. Manually enter a configuration entry - c.chnl[n].dst.tcps.successmsg = “string” (where n is the channel number, and string is the text to send back).

- In all cases, the TCP/IP sockets have a 2 minute keep alive programmed. If the link is broken for more than 2 minutes, the socket is closed.

10.6. TCP Push (active/client)

TCP Push corresponds with TCP Server, except the ip.buffer will actively open the socket *into* the central site to deliver the data.

Interface	<p>“LAN only” - will connect only using Ethernet</p> <p>“Modem only” - will always use PPP</p> <p>“LAN then Modem” - will try to use Ethernet. If that fails it will try PPP</p> <p>“Modem then LAN” - will try to use PPP and if that fails it will try Ethernet.</p> <p><i>Note: For the Modem dial-out setup see section 7.2.5 [LAN only]</i></p>
Address	The name or IP address of the TCP server to connect to. <i>[blank]</i>
Port	The TCP/IP port the server is listening on. <i>[3001]</i>
TLS/SSL	<p>“No encryption” - a plain TCP/IP session</p> <p>“Implicit (by port)” - starts with an SSL/TLS connection. If the server is not an SSL/TLS server the delivery will fail.</p> <p><i>[No encryption]</i></p>
On Complete	<p>“Disconnect (one-shot)” - once connected the ip.buffer will “freeze” the data, send only that data, wait 3 seconds then close the socket. The ip.buffer will then delete the data. Data is deleted only when the complete amount has been sent.</p> <p>“Stay connected (real-time)” - data is sent in 32k chunks to the computer. The data is deleted from the store as it progresses¹⁷. <i>[Stay connected (real-time)]</i></p>

¹⁷ In this mode the ip.buffer will always try to connect to the TCP server. The “Push triggers” are not required in this mode. This eliminates the need to enter special settings in the triggers as required in version 1.55 and before, and now makes the ip.buffer behave like the NetBuffer in this respect.

10.7. COM port serial

The “COM port serial” delivery option allows pushing the data out through one of the unused COM ports of the ip.buffer. This allows for collection from TCP/IP devices and delivery to standard serial equipment or PC ports. With the ip.2 and ip.4 products it is possible to collect on one COM port and deliver to another.

● The COM port serial is output only. Anything transmitted *into* the delivery COM port will be discarded.

Port	Which COM port to deliver on. [COMn]
Baud	The baud rate [19200]
Protocol	The number of data bits and parity. [8N]
Tx Pin	Which pin to transmit on. “Auto” - automatically detects the DCE/DTE pinout ¹⁸ . “Pin2 (DCE/PC)” - a straight cable from the ip.buffer to the PC can be used. “Pin3 (DTE/PC+Null)” - a null-modem cable from the ip.buffer to the PC should be used. [Auto]
Tx Flow	Which control lines to monitor when deciding whether we can send data into the device. The ip.buffer will wait for the handshake lines to be asserted for 5 seconds before considering the connection “connected” and sending data. If the handshake lines remain unasserted for 10 seconds the ip.buffer will consider the connection closed and finalise the delivery. [CTS & DSR]
Tx Size	Determines the maximum chunk size to transmit. The Tx Flow control lines are only checked before sending each chunk. If the connected device has a small input buffer and uses hardware flow control then lower this value ¹⁹ . [16]
Tx Pause	Allows insertion of an inter-byte gap on transmission. The value is measured in bits, so a value of 10 will halve the transmission speed. Use larger values to slow down the transmission into slow devices. [0]

¹⁸ Auto requires that both TX and RX be connected to detect the pin-out. For connections with only TX you must use one of the non-auto modes.

¹⁹ When using higher baud rates (e.g. 115200), very small values of Tx Size will cause excessive CPU load when sending very large amounts of data out of multiple COM ports and may cause the ip.buffer to reset.

10.8. Legacy Emulation (TCP Server)

The legacy emulation option provides the ip.buffer with the ability to behave like legacy command-line driven buffers.

● This option is not visible unless a suitable Emulation Lua script has already been loaded into the buffer, and the Lua core has been rebooted.

Port	<p>The TCP/IP port to listen on. This port must be a unique number within the ip.buffer (i.e. you cannot have two channels listening on the same port number).</p> <p>Most legacy devices will use port 23. [6001]</p>
Interface	<p>“LAN only” - allows incoming connections only from Ethernet.</p> <p>“Modem only (PPP)” - allows incoming connections only from PPP. Ethernet will not connect. Modem dial-ins <u>must</u> use PPP only.</p> <p>“LAN, Modem (PPP & Legacy)” - Allows Ethernet, dial-in PPP connection, and legacy-style “dumb” modem dial-in connections. [LAN, Modem (PPP & Legacy)]</p>
Allow	<p>You can enter a single name or IP address to restrict access to the TCP server on the LAN²⁰. Any non-matching clients will have their connection closed before any data is sent.</p> <p>(Hint: leave this blank until you have the system working, and <i>then</i> secure it with a value)</p> <p>If you want to restrict connections to just “dumb” legacy modem dial-in, then set this to “127.0.0.1” [blank]</p>
TLS/SSL	<p>“No encryption” - a plain TCP/IP session. Most legacy devices will not use TLS/SSL for their socket connections.</p> <p>“Implicit (by port)” - starts with an SSL/TLS connection. A client that connects with plain TCP/IP will time out and be disconnected²¹. [No encryption]</p>
Client Type	<p>“Auto” - if the client software negotiates Telnet options then we send back further Telnet options.</p> <p>“Telnet” - The ip.buffer sends Telnet options when the client connects. This is necessary when a Linux telnet command is used to connect to a non-standard port.</p> <p>“Raw TCP/IP” - No Telnet options. Every byte is transferred without modification between source and pass-through. [Telnet]</p>

²⁰ When dialling in with a modem the “Allow” address is ignored.

²¹ The “dumb” legacy modem dial-in mode will only work if “No encryption” is chosen.

10.9. None (*Passthrough only*)

In “Pass-through only” mode the source will not store data, although the records are still handled and can be detected in Lua. The source port can be used for moves and changes and administration options.

See section 9.6.13.

10.10. Destination Common Modules

10.10.1. Data Markers

The data markers provide a convenient way to prefix and suffix some text to the output data - irrespective of the data delivery itself.

Prefix	This text is added to the beginning of the output. You can include the special “%” characters outlined in section 9.6.12 <i>[blank]</i>
Suffix	This text is added to the end of the output. In the case of a TCP real-time link, this suffix is not applicable as the socket never closes. <i>[blank]</i>

10.10.2. Data Security

The data security module applies to all destination types (except “None (passthrough only)”).

Data Security

Data Encryption	“ Unencrypted ” - send the data in plain-text format. “ Scannex Encrypted ” - encrypts the data using the Scannex 40-bit stream cipher. If the destination specifies compression, then the compression is applied <i>before</i> encryption. <i>[Unencrypted]</i>
------------------------	--

10.10.3. Push Triggers

Push Triggers

The push methods (Email, FTP Push, HTTP POST, and TCP Push) require a trigger to initiate the transfer of data to the central server.

Full	Initiate a delivery when the channel has more than this amount of data (in kilo-bytes) “0” will disable this trigger. [0]
Pause	When there has been more than this value (in seconds) pause in the incoming data stream the ip.buffer will deliver the data. “0” will disable this trigger. [0]
Modem ring	“Ignore” - do nothing when the modem rings. “Deliver on Ring” - ringing the ip.buffer for 6 seconds or less can initiate a delivery of data on all channels with this value set. [Ignore]

Push Schedule

In addition to the triggers, there is a powerful scheduler that allows for timed deliveries.

Condition	“Always” - trigger a delivery at the schedule times. “Only when data” - only trigger a delivery at the scheduled times if there is something to deliver. [Only when data]
Deliver Every	Sets the interval (in minutes) to deliver data during the specified days. “0” means deliver once only (the At/Between time) [60]
At/Between	The start time for delivering. [0800]
...and	The end time for delivering (not used if “Deliver Every” is set to 0. [1800]
On These Days	Tick the days to deliver on. [none]
At all other times Deliver Every	This value specifies the interval (in minutes) to deliver when outside the days and/or times above. “0” means do nothing. [0]

Failures

Retry time	Specifies the time (in seconds) between retry attempts. Note: If the delivery method uses the modem, please note the modem has its own hold-off timing mechanism. See section 7.2.5 [60]
-------------------	---

11. Storage

Each channel can control how the NAND flash is apportioned.

<p>Reserved¹</p>	<p>When the NAND flash is full the memory manager will ask around the storage areas requesting a block². A storage file can decide whether it will give up a block for the benefit of another.</p> <p>If the total memory in the channel is less than the reserved value the memory manager will ask another storage file.</p> <p>This mechanism allows for the protection of data. However, if the file uses less than the reserved amount the memory is available for other files.</p> <p>“0” will disable this feature for the channel. [0]</p>
<p>Maximum</p>	<p>When a storage file wants to save data in the NAND flash it will consult this limit. If the file has more than this amount it will not ask the manager for more space - instead it will sacrifice some of its own, or ditch the new data (depending on the “When full” setting).</p> <p>“0” will disable this feature for the channel - allowing the channel to use up to the total amount of memory in the ip.buffer. (“When full” does not apply.) [0]</p>
<p>When full</p>	<p>“Erase old data” - reuse an old block from this channel. The “Lost Old” counter will increase.</p> <p>“Stop storing” - throw away new data. The “Lost New” counter will increase when the channel reaches the “Maximum” value³. [Erase old data]</p>

¹ Not visible in the ip-1 product range

² One block = 128k-bytes

³ Note, this is not when the storage area is full!

12. Tools

<http://192.168.0.235/tools/tools.shtm>

The ip.buffer includes a menu for tool-type controls¹.

12.1. General

12.1.1. Live Record View

<http://192.168.0.235/tools/live.shtm>

The live record view shows the incoming data. Choose the channel number from the quick selection on the right hand side of the page.

At the top of the page is a choice of display presentation:

View As:

ASCII Only	Shows just printable characters
ASCII + Codes	Show printable characters and any hex codes in red.
Hex	Shows a binary hex dump view of the data

Records:

List	Show up to 10 records. Records are alternately highlighted.
Single	Show only a single record.

Refresh:

Stop	Don't update the Live View display.
Auto-refresh	Updates the display every 2 seconds

Click the “Download” URL to download the *latest* 10 records².

12.1.2. Storage Counters

<http://192.168.0.235/tools/storage.shtm>

This page shows how many blocks each storage file is using, as well as how many bytes have been lost. “Lost Old” is the number of bytes that have been recycled because the channel was full. “Lost New” is the number of bytes that had to be thrown away because there wasn't space.

Click on the “[Reset Counters](#)” to zero the Lost Old and Lost New counters.

¹ In versions prior to 1.50 this was simply “Diag” in the top menu bar. The “Tools” menu option is new to v1.50

² Note that these downloaded records may be newer than those displayed.

12.1.3. Reboot Lua

(post) <http://192.168.0.235/lua/rebootlua>

Reboots the internal Lua scripting engine. A Lua reboot is required if any *script* changes have been made³. Rebooting Lua does not stop the delivery mechanisms from working. However, because of the Lua protocols, all source collections are restarted.

- If the scripts make use of internal variables then these are cleared. There is no persistence between reboots.
- Rebooting Lua will also temporarily disconnect all sources⁴.

12.1.4. Reboot ip.buffer (cold boot)

(post) <http://192.168.0.235/lua/reboot>

Reboots the unit completely. The page asks for confirmation before actually rebooting.

12.2. Modem

12.2.1. Clear timers

(post) <http://192.168.0.235/public/modemclear>

Clears the hold-off timers associated with the dial-out modem. This action is also available from within the status web page.

12.2.2. Hangup & Reset

(post) <http://192.168.0.235/lua/modemreset>

If there is a current modem connection it is hung up. The modem is then reset and will be ready for the next dial-out or dial-in operation.

12.3. Source, Pass-through, and Destination

The tools page also includes options for aborting connected sockets. These options show only when the socket is connected:

- Aborting any connected Source ports (only the connected ones are visible)
- Aborting any connected pass-through sockets
- Aborting any delivery transfers

³ Reboots are not required for any *configuration* changes - either by the web page or the Ad Hoc change. These occur immediately.

⁴ Also any “emulation” destinations will be disconnected.

12.4. Network

12.4.1. Ping a device

<http://192.168.0.235/tools/ping.shtm>

Provides a convenient way to ping a device from the ip.buffer. Enter an IP address or name and then click the “Ping” button. Four ping attempts will be made.

For example, if an ip.buffer is sitting behind a firewall or router and you exchange the ip.buffer for another while keeping the same IP address there will be an Ethernet MAC address mismatch (the router will have cached the original IP address-to-MAC in its ARP table). By pinging the router you should automatically update the router’s ARP table.

12.4.2. Listening Ports

<http://192.168.0.235/tools/ports.shtm>

The listening ports page shows all the port numbers for TCP/IP and UDP/IP server sockets in the ip.buffer. It is important that all port numbers are unique - and this page helps to see the overall configuration of the ip.buffer.

12.4.3. Network Table

<http://192.168.0.235/tools/netstat.shtm>

Shows the TCP socket, UDP socket, ARP table, and Routing table of the ip.buffer. It is helpful in diagnosing TCP connection issues.

The ARP table list also includes a “[x]” link to allow you to delete any particular IP-to-MAC entry.

12.5. Log

The ip.buffer keeps an ASCII, RAM-based, log of all activity. This includes SNMP traps output, syslog messages output, modem events, source and destination events, and others. The log is circular and will erase old messages when the log exceeds 32k-bytes.

12.5.1. View Log

<http://192.168.0.235/luu/log.txt>

Clicking this link shows the ASCII log. You can also right click and select “Save Link As...” to save straight to disk.

12.5.2. Send Log

<http://192.168.0.235/luu/sendlog>


Clicking this will send the log to the Alert channel (either email or http POST). See section 7.2.7 for setting up the Alerts. Note: The “Send Log” option under the Tools menu will send the log even if the setting “Send log” is set to “No” (see 7.2.7).

12.6. System

12.6.1. Upgrade Firmware

<http://192.168.0.235/setup/firmware.shtm>

Allows upgrading of the ip.buffer application.


 This is duplicated in the Setup / Advanced page. See Section 13.4.1

12.6.2. Check for Updates

(post) <http://192.168.0.235/lu/checkupdate>

Triggers the HTTP POST update mechanism to check for updates immediately.

Note that the ip.buffer will also check whenever it boots (or when Lua boots).

 Progress is not shown on the main status screen. All progress, errors and events are saved to the log file.

12.6.3. System Memory

<http://192.168.0.235/tools/mem.shtm>

Shows internal system memory values.

Useful for seeing how much Lua memory has been used.

12.6.4. Diagnostics Dump

<http://192.168.0.235/lu/diag.txt>

Provides a complete dump of the configuration, information, diagnostic Lua tables, as well as the TCP/IP network information and all scripts.

When reporting any issues back to Scannex this page is essential.

13. Advanced Setup / Configuration

<http://192.168.0.235/setup/advanced.shtm>

13.1. Configuration

13.1.1. Edit

<http://192.168.0.235/setup/config/edit.shtm>

The Configuration:Edit page shows the complete Lua configuration tree for the ip.buffer. This configuration includes everything that can be programmed through the web pages of the ip.buffer.

Most of the entries conform directly and logically to the HTML pages.

You can choose to edit the whole tree. Alternatively, you can clear the edit box on the web page and enter just the changes that are required. For example, if you want to just adjust the address of the SMTP server for SMTP1, clear the box and enter:

```
c.smtp[1].address="192.168.0.123"
```

This will update just that setting.

It is worth mentioning that the text that you post from this edit box is actually Lua code, so you can include Lua functions and condition statements. For example, if you want to adjust the SMTP 1 only if it equals a certain value you could enter:

```
if (c.smtp[1].address == "mail.scannex.com")
  c.smtp[1].address = "mail2.scannex.co.uk"
end
```

BE CAREFUL when editing the configuration. Any changes to the username and password for the web, c.web.setup.user and c.web.setup.pass, will be applied immediately - if you have forgotten the settings, or have inadvertently changed them, you will be unable to access the ip.buffer again (except by erasing everything, as outlined in section 4.3).

13.1.2. Ad hoc change

<http://192.168.0.235/setup/config/adhoc.shtm>

The “Ad hoc change” url performs the same function as the “Edit” url, except that the edit box is already blank. This allows the quick entry of single changes, or special Lua commands.

Special commands

There are some special commands that can be entered in this edit box. For each of them, clear the whole box (Ctrl-A and then Del):

`prune()`

Prune will clear out any unknown configuration settings. It is possible to save extra settings and information in the Lua config tree. To get back to a set that the current firmware version recognises (and that alone), use the prune function.

`mem.wipestore(n)`

This will instruct the memory storage code to completely erase the channel’s data. e.g. “mem.wipestore(1)” will erase channel 1 data.

`mem.resetflags(n)`

Resets the “Lost Old” and “Lost New” counters for the given channel.

13.1.3. Download

<http://192.168.0.235/lu/config.txt>

This link will download the complete Lua configuration tree - either to the browser, or a file (if you use the “Save Link As” option in the browser).

Use this to store a backup of all the configuration settings of the box.

See also section 14.1

13.1.4. Upload

<http://192.168.0.235/setup/config/load.shtm>

This link will allow the programming of the ip.buffer configuration settings by uploading a file from the PC.

See also section 14.1

13.2. Script

The ip.buffer uses the Lua scripting engine. The Lua compiler and byte-code interpreter is about one-tenth the size of a Java virtual machine (JVM) - about 100k. Since it is very small it runs well in embedded devices with limited processing power.

Scannex have extended the core of Lua to include various extensions. Most extensions are small, but they enhance the overall usability of Lua. Documentation, tutorials and other information for Lua is available from www.lua.org

In addition, the printed book “Programming in Lua” by Roberto Ierusalimschy is a valuable guide.

The ip.buffer is designed to use Lua for storing and processing all configuration parameters, as well as for the ability to filter and modify the incoming data streams¹.

13.2.1. Edit

<http://192.168.0.235/setup/script/edit.shtm>

This link allows complete editing of the Lua script. Typically this script is used for filtering and processing the incoming record data.

Any changes to the script will require a reboot of the Lua core.

- Rebooting the Lua core is not the same as rebooting the ip.buffer. All channels continue to be connected, and all delivery processes continue while Lua reboots.
- Rebooting Lua will temporarily disconnect all sources².

13.2.2. Download

<http://192.168.0.235/luascript.shtm>

This link allows the download of the Lua script - either to the browser or to file.

13.2.3. Upload

<http://192.168.0.235/setup/script/load.shtm>

This link allows a pre-written Lua script to be sent to the ip.buffer. Again, changes to the script will require a reboot of the Lua core. (See section 13.2.1)

¹ Most of the ip.buffer is actually coded in C++. Lua is an extension to the system. C++ tasks continue to run to perform the main collection, delivery, and housekeeping of the system.

² Also all “emulation” destinations are disconnected.

13.3. Server Certificate

For SSL/TLS server operation the ip.buffer requires at least one certificate to allow the client to identify the ip.buffer. When shipped the ip.buffer includes the following certificates:

- Scannex Root CA certificate
- Scannex ip.buffer certificate
- Default ip.buffer certificate for 192.168.0.235

The client will check whether the last certificate matches the address used to access the ip.buffer. If they mismatch the client normally shows an error. So that you can customise the certificate you can either generate a certificate or upload one you create on a PC.


13.3.1. Generate

<http://192.168.0.235/setup/makecer.shtm>

Hostname	The name for the certificate. The client checks that this hostname matches the address used to access the ip.buffer. Can be either an IP address (e.g. 192.168.0.235) or a name (e.g. ipbuffer.scannex.co.uk). It defaults to the address you used in the browser and should not require changing.
Organisation Name	Optional
Organisation Unit	Optional
City	Optional
State or Province	Optional
Country	A two character certificate identifier. e.g. "US" or "GB" [GB]
Email	Optional

The optional fields are helpful for the client if trying to find out who to contact.

Pressing "SAVE" will generate the certificate.

 Certificate generation is extremely processor intensive. While generating a certificate the collection and delivery will be slowed down. However, you should only need to generate a certificate once (it will expire in the year 2037).

13.3.2. Upload

<http://192.168.0.235/setup/loadcer.shtm>

If you wish to generate a certificate that is not linked to Scannex you can create a certificate and private key and upload them.

You can use a tool like OpenSSL to create a stand alone certificate, or one that is signed by a self-signed root CA, and upload the results to the ip.buffer.

● You **must** upload both a certificate and matching key! If the key does not match you will not be able to use the HTTPS or SSL server services.

● Since the private key is uploaded in unencrypted PEM or DER format you should make sure the link between the PC and ip.buffer is secure and not being sniffed. A key compromise will invalidate any imagined security!

Note: when using HTTPS the PC will usually cache the connection and newly uploaded certificates will not be visible to the PC until you restart the browser.

13.4. System

13.4.1. Upgrade Firmware

<http://192.168.0.235/setup/firmware.shtm>

The firmware in the ip.buffer is stored in a special area of the NAND flash. This option allows the ip.buffer to be remotely upgraded.

You will need a valid “.BLF” file from Scannex to upgrade the firmware.

Fail safe upgrading

The ip.buffer actually has two main sections of code. The first provides for boot time services and gets the hardware basically configured and ready to accept the main firmware³. This first part is not user modifiable - it is programmed at the factory.

The second is the firmware as stored in the NAND flash. There is space for two full copies of the application firmware so that any failures on upgrading are recovered. On boot up the primary loader validates the “.BLF” file, as loaded through the web, and either runs the new code, or defaults to the previous version in case of an incomplete or erroneous file.

This makes it safe to perform a remote upgrade over a modem link, even when there is a possibility of power or line failure.

● After upgrading, it may be necessary to press Ctrl-F5 in your browser to reload the cached files on the PC.

³ In actual fact, the first part is split into three. There is the CPU’s ROM loader, a micro loader, and a web-based bootloader.

13.4.2. The Last Resort

The ip.buffer also includes a web-based boot loader, in the unlikely event that the main application firmware is erased, or will not boot. This web-based boot loader includes a very small web-server that allows LAN based updates.

- Power off the ip.buffer
 - Press the button on the front panel...
 - While holding the button, power up the ip.buffer
 - When you see the LEDs “beeble” (i.e. walk from right to left in a line), let go of the button.
 - The red LED should continue to flash
- Now run SEDiscover
- Locate the ip.buffer - the name will be “!**!** **LOADER** **!**!”
- Use the web-browse function to view the ip.buffer
 - From there you can erase and/or upload a new BLF file to the ip.buffer and reboot

This operation can only take place over the LAN, not over a modem link.

14. Advanced Topics

14.1. Replication of settings

If you have a large number of ip.buffers to configure, you can quickly replicate their settings. Follow this procedure:

- Program up a target ip.buffer
- Use the Configuration / Download to save to a file.
- Edit the file and remove the following lines¹:
 - c.network.name
 - c.network.ip
 - Remove any other settings that are different between each unit
- Now connect each ip.buffer in turn:
 - Use SEDiscover to locate and web-browse the buffer
 - Use the Configuration / Upload to send the modified file

● If you have chosen to hide passwords then you cannot replicate the passwords! They should either be manually edited into the config file or set manually via the web pages.

14.2. Lua extensions

These extensions are available for the scripting. See section 13.2

The full list of Lua extensions and variables is available in the Scannex document “ip.buffer_oemlua_manual”.

14.2.1. Alert System

`alert.register_oneshot(id, msg)`

Registers a “one shot” alert. As soon as the alarm is triggered for the id, the alert is sent. If the “msg” is not blank, then this sets the default text that accompanies the alert (which can be overridden in the call to alert.alarm)

e.g. `alert.register_oneshot(“Test”, “Default message”)`

`alert.register_holdoff(id, msg, time, repeat)`

Registers a “hold off” style alert. The alert will be sent on the first alarm occurrence, but will have to wait for “time” minutes before it is considered reset. If the alert does not reset the alert is repeated every “repeat” minutes. A value of zero implies no repeat.

e.g. `alert.register_holdoff(“PBXFailure”, “”, 10, 0)`

¹ c.network.name because each box should have a unique name in the whole system, and c.network.ip as each probably has a separate IP address - unless they are being installed in DHCP enabled situations or in separate physical sites.

```
alert.register_counter(id, msg, limit, period, repeat)
```

Registers a counting alarm. If more than “limit” alarms occur within the “period” minutes the alert will be triggered. While triggered the alert will be resent every “repeat” minutes.

e.g. `alert.register_counter(“PBXFailure”, “”, 10, 60, 120)`

(Will email if more than ten alarms occur within 60 minutes, and repeat the email every 2 hours while triggered.)

```
alert.alarm(id[, msg])
```

Triggers an alert with the optional override message.

e.g. `alert.alarm(“PBXFailure”, “CPU fail”)`

14.2.2. Delivery Trigger System

```
trigger.push(n)
```

Forces a delivery push for channel “n”.

e.g. `trigger.push(1)`

```
trigger.cancel(n)
```

Cancels the “trigger” value for the delivery push for channel “n”.

e.g. `trigger.cancel(1)`

14.2.3. Comments within Lua code

```
//  
--
```

Both “//” and “--” comments. The “//” is for those familiar with C++, while “--” is the native Lua comment.

14.2.4. Sending data to the channel source

```
sources[1]:write(string)
```

Writes the *string* to the source on channel 1. If the call is made within the context of channel 1 (e.g. in the “onrecord” event for channel 1), then the call will block until all data has been sent. In all other cases the data is sent through to a 4k buffer - if the buffer is filled faster than it can be transmitted then it overflows and data is lost.

To send data through to channel 2, uses `sources[2]`, etc.

Note: use a colon, not a dot! Equivalent to `source.write(sources[1], string)`

14.3. Example scripts

More information on programming in Lua is available from:

<http://www.lua.org/>

<http://www.lua.org/pil/>

and from the book “Programming in Lua, 2nd Edition”.

14.3.1. Simple prefix

This simple script demonstrates how to perform simple filtering and changes to the incoming record stream.

In this example, we assume that channel 4 is being filtered and we need a simple date and time prefix to each record, in the form “MM/DD HH:MM”.

```
function datetimestamp(rec, chnl, tag)
  local t,s
  t = i.now
  s = string.sub(t,6,7).."/"..string.sub(t,9,10)..
  "..string.sub(t,12,13)..":"..string.sub(t,15,16).. "
  mem.write(chnl,s..rec)
end

x.chnl[4].src.onrecord = datetimestamp
```

The function “datetimestamp” simply takes the global value “i.now” and splits it into the month, day, hour and minute values. It then writes the prefix and original record to the memory channel specified (you could also use a hard-coded channel number, e.g. “mem.write(4,s..rec)”.

The last line “glues” the function to the event for channel 4, so that when a record arrives the ip.buffer will call the Lua function rather than storing.

● This functionality is easier to do with the Protocol Time Stamp field of “%m/%d %H:%M ” (without the quotes)

14.3.2. Duplicating data

It may be necessary to accept data from one source channel (e.g. a serial port) and store into two separate memory channels. The individual channels may then send the data in two different directions to minimise the probability of data loss.

```
function duplicatestore(rec, chnl, tag)
    mem.write(1, rec)
    mem.write(2, rec)
end

x.chnl[1].src.onrecord = duplicatestore
```

Here, the function that is glued to the event for channel 1 will store the data into *both* channels 1 and 2. (Note that channel 2 should not be connected to another data source as well, otherwise its data will be interleaved with the duplicate data!)

14.3.3. Discarding data

Data can be thrown away by not making a call to “mem.write”:

```
function discarddata(rec, chnl, tag)
    -- do nothing
end

x.chnl[2].src.onrecord = discarddata
```

Here, data arriving at channel 2’s source will just be thrown away. Of course, you could selectively throw the data away depending on the content of the record. In that case you can use the Lua string functions to determine which action to take - do nothing or make a call to “mem.write”.

14.3.4. Masking telephone digits

This complex function will mask either the last 4 numbers, or keep the first 8 only - depending on the length of the number.

```
x.chnl[1].src.onrecord = function(s,c,t)
  s = string.gsub(s, "%d%d%d%d%d%d%d[%d%*#]*", function(n)
    local len=string.len(n)
    if (len>8)
      then return string.sub(n,1,8)..string.rep("X",len-8)
    else return string.sub(n, 1, -5)..string.rep("X", 4)
    end
  end)
  mem.write(c,s)
end
```

The gsub parameter “%d%d%d%d%d%d%d[%d%*#]*” will look for all strings that include 7 digits, followed by any number of digits, *, or # characters.

The anonymous function provided as a replacement for the string will:


- Work out the length - stored in “len”
- If the length is longer than 8 characters, it will keep the first 8 characters, and substitute the remaining characters with “X”.
- If the length is less than, or equal to, 8 characters then it will effectively replace the last 4 characters with an “X”.

Obviously, any other combination is possible.

See “Programming in Lua, 2nd Edition”, pages 180-191 for more information on the string.gsub function, or <http://www.lua.org/pil/20.2.html> and <http://www.lua.org/pil/20.3.html>.

15. SNMP Traps

Trap OID: enterprises.6024.1.3

 The complete MIB file is available for download from our website:
www.scannex.com

15.1. Trap List

Action	SpecificTrap	MIB definition
Power Up	1, 0x01	The ip.buffer has booted and started running code
Power off	2, 0x02	The power has failed. These are the dying words of the ip.buffer!
Reboot request	3, 0x03	A reboot has been requested. Expect a "Power Up" trap to follow as the ip.buffer restarts.
Lua reboot	4, 0x04	Lua has been rebooted
Battery power	5, 0x05	The ip.buffer is running on battery power
Mains power	6, 0x06	The ip.buffer is running on mains power
Configuration	7, 0x07	The ip.buffer has been reconfigured
Low Voltage	8, 0x08	The ip.buffer has started up running on a PSU that is too low
User	9, 0x09	Script generated user trap ¹
Auth fail	16, 0x10	An authentication failure
Source connected	32, 0x20	A channel has connected
Source disconnected	33, 0x21	A channel has disconnected
Channel is full	34, 0x22	Channel has reached its full limit (resent every 8 hours)
Channel is quiet	35, 0x23	Channel has had no data (resent periodically)
Comfort	64, 0x40	ip.buffer is still alive (sent at the interval specified in the alerts setting page)
Memory full (global)	65, 0x41	Global memory is full, as set in the alerts setting page (resent every 8 hours).
Low temperature	66, 0x42	The ip.buffer temperature is too low
High temperature	67, 0x43	The ip.buffer temperature is too high

15.2. Variable Bindings

Name	OID	Description
ipbufferserial	enterprises.6024.1.3.1	Binary serial number
ipbuffername	enterprises.6024.1.3.2	The device name (as programmed in the web page)
ipbuffermessage	enterprises.6024.1.3.3	Human readable description
ipbufferchannel	enterprises.6024.1.3.4	Channel number (string)
ipbuffertemperature	enterprises.6024.1.3.5	Temperature in degrees Celcius (integer). not ip.1

¹ The script can also generate arbitrary specific trap numbers above 68 (e.g. 10001).

16. SNMP Agent OID List

The simple SNMP agent is suitable for “SNMP pinging” and automated network inventory. The agent responds to SNMP v1 and v2c on the “**public**” community and provides SNMP GET and GETNEXT commands only (no bulk operations and no SET operations).

It provides only the SNMP MIB-2 system group - 1.3.6.1.2.1.1 - as outlined:

1.3.6.1.2.1.1.1.0	sysDescr	See notes below
1.3.6.1.2.1.1.2.0	sysObjectID	The OID of the ip.buffer - 1.3.6.1.4.1.6024.1.3
1.3.6.1.2.1.1.3.0	sysUpTime	The system up time
1.3.6.1.2.1.1.4.0	sysContact	Programmable via the web page
1.3.6.1.2.1.1.5.0	sysName	Fixed value of “ip.buffer-serial”, e.g. “ip.buffer-00-02-ae-10-00-ae”
1.3.6.1.2.1.1.6.0	sysLocation	Programmable via the web page
1.3.6.1.2.1.1.7.0	sysServices	Fixed integer value of 72

The sysDescr field contains information about the buffer in the form:

```
SN="serialnumber" DN="devicename" FW="firmwareversion" N=
"comports,channels,files" M="modem" Scannex ip.buffer
```

17. HTTP Server Implementation

The ip.buffer supports standard HTTP or HTTPS POSTs to a compliant web-server. Data, alerts, logs, diagnostic dumps, and upgrade requests can all be sent to the web-server¹.

This section details some of the implementation requirements for the web-server - allowing you to code your own server-side scripts to process the incoming data from the ip.buffer.

17.1. Chunked POST

The web server must support “chunked POST”². Unfortunately not all servers support “chunked POST” (even though the RFC specifically says that all web-servers should support it!). The server will usually send back an error message if it does not support it - though some have been seen to crash!

All servers will support requests made to them that have a “Content-Length” field available in the header. However, since the ip.buffer cannot know in advance the content length (because it does not have space to pre-buffer the request) it must use a chunked encoding instead³.

Servers that are known to work include:

- Apache 2.2 (early versions of Apache do not support chunked encoding)
 - We have tested with PHP on Windows
- Microsoft IIS + ASP.NET
 - We have test with IIS under Windows XP Pro with ASP.NET version 2.0.
 - ASP.NET itself provides the means to handle chunked encoding.

The old fashioned regular CGI cannot support chunked encoding, alas. ISAPI can support chunked POSTs (as does ASP.NET). However, both the server and the extension need to be chunked POST aware (so not all ISAPI extensions can support chunked, even though the server itself may).

17.1.1. Testing

It is possible to test chunked POST support using the “cURL” command line tool⁴. Include the parameter `--header "Transfer-Encoding: chunked"` to test.

e.g.

```
curl -v --form name=test --form channel=one --header "Transfer-encoding: chunked" 192.168.0.116/test/test.ashx5
```

¹ Details and sample code for diagnostic dumps and central updates are available from Scannex on request.

² See http://en.wikipedia.org/wiki/Chunked_encoding

³ Many phones have to likewise support chunked POSTs for requests that exceed a small amount (e.g. 1k). For example the Apple iPhone sends chunked POSTs.

⁴ Available from <http://curl.haxx.se/>

⁵ Remove the “-v” if you don't want verbose diagnostic output!


17.2. Multipart POST fields

The web-server needs to have a script written (in PHP, Python, Perl, ASP.NET, etc) to tell it what to do with the POST'd data.

The ip.buffer will always send a multi-part form in the POST, and will include the following fields:

name	The box name / site name as a string.
channel	The name of the channel that's doing the HTTP push
serial	The serial number of the ip.buffer
sequence	The 8-digit-hex sequence number
data	The data attached as a file upload. Filename is programmable.
info	The status information attachment. Filename is "info.txt"
log	The log file attached as a file upload. Filename is "log.txt"
alert_XXX	Alert messages are sent with field names beginning with "alert_". The alert tag name can be extracted from the field name. The field value consists of the data and time followed by the alert text, in the form "YYYY-MM-DD HH:MM:SS <i>alerttext</i> ".

In addition, there are various POST fields that appear as part of the HTTP POST Update requests from the ip.buffer.

 Note that not all fields may be present! "name" and "serial" will always be present, but the other fields will appear only if relevant.

17.3. Server Response

Most scripted languages will return an HTTP 200 response page by default. The script should therefore include a clear indication of a successful upload. Please check the following points:

- The success message should be on a separate line. i.e. send a CR/LF combination before sending the success message. If the success message is at the end of a very long line then the ip.buffer may not see the response!
- Make sure the success message is unique and cannot be returned in any other situation - e.g. when the web-server sends back some kind of informative response (e.g. Microsoft IIS + ASP.NET can send back full debugging information when a script fails! Either disable debug feedback or carefully word the success string).
- The success string is case sensitive.
- If the ip.buffer does not see the success message then it will try the POST until it succeeds.

If the server responds with any other HTTP return code (e.g. 500, 403, 404 etc) the ip.buffer considers this a "failed" situation and will try again.

18. Licenses

18.1. Lua License

Lua is licensed under the terms of the MIT license reproduced below. This means that Lua is free software and can be used for both academic and commercial purposes at absolutely no cost. For details and rationale, see <http://www.lua.org/license.html> .

Copyright (C) 1994-2008 Lua.org, PUC-Rio.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

18.2. zlib License

```
/* zlib.h -- interface of the 'zlib' general purpose compression library
   version 1.2.3, July 18th, 2005
```

Copyright (C) 1995-2005 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly jloup@gzip.org
Mark Adler madler@alumni.caltech.edu

```
*/
```

18.3. PolarSSL License

Based on XySSL: Copyright (C) 2006-2008 Christophe Devine

Copyright (C) 2009 Paul Bakker

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the names of PolarSSL or XySSL nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 2006-2007 Pascal Vizeli

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the XySSL nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

18.4. SNMP Trap Decoding

The SNMP trap decoding is a modified version of the “print-snmp.c” file from the tcpdump/Windump package.

Copyright (c) 1990, 1991, 1993, 1994, 1995, 1996, 1997
John Robert LoVerso. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

19. Specifications

Serial Port(s)	RS232/V24, 9-pin plug. Auto DCE/DTE selection (rx pin 2 or 3) Output pin resolves according to input detection (or manually set). Baud: 300-115200 baud Data: 7-bit odd/even, 8-bit odd/even/none Full autobauding and parity detection within this range.
Network	100base-TX/10base-T, RJ-45 unshielded, full/half duplex, auto MDIX (auto cross-over).
Memory	32Mb/64Mb/128Mb flash. 10 year data hold up without battery (4Mb used for firmware)
Power supply	Electrical: 7V - 9VDC, 300mA (and optional 48VDC, 60mA) Physical: 5.5mm barrel / 2.1mm hole, centre +ve Battery backup option: minimum of 2 hours operation
Power consumption	(including PSU): 3W / 10BTU/h
Physical	Temperature: 5-55°C (40-140°F) Humidity: 20-80% R.H. (non condensing)
ip.1-32(m)	Dimensions: 160 x 120 x 45mm / 6.3" x 4.7" x 1.8" (LxWxH) Weight: 0.25kg / 0.55lb
ip.4-128.m ip.2-64.m	Dimensions: 250 x 160 x 42mm / 9.8" x 6.3" x 1.7" (LxWxH) Weight: 1kg / 2.20lb
EMC	CE Marks Class B (EN55022, EN55024) FCC CFR 47: Part 15 Class B CISPR 22 Class B CISPR 24 AS/NZS 3548 Class B (Australia & New Zealand) ICES 003 Class B (Canada)
Safety	CE (EN60950) IEC 60950-1 CB
Modem	(only applicable to ip.buffer containing a modem) FCC Part 68 UL Listed (E150299) R&TTE (Europe) IC:125A-0017 (Canada) A-tick -ACN 092448710 (Australia & New Zealand)
Environmental	RoHS Compliant

20. Modem Country Codes and Approvals

The internal Multitech MT5656RJ modem currently has the following approvals, and country code settings (if connected to a PBX extension, however, use the default “B5”):

Country	Abbreviation	Approval Status	Country Code
AFGHANISTAN	AF	-	B5
ARGENTINA	AR	Approved	07
AUSTRALIA	AU	Approved	09
AUSTRIA	AT	Approved	FD
BAHRAIN	BH	Not Planned	
BELGIUM	BE	Approved	FD
BRAZIL	BR	In Process	16
BULGARIA	BG	Approved	FD
CANADA	CA	Approved	B5
CHILE	CL	Approved	99
CHINA	CN	Approved	B5
CYPRUS	CY	Approved	FD
CZECH REPUBLIC	CZ	Approved	FD
DENMARK	DK	Approved	FD
ECUADOR	EC	Not Planned	
ESTONIA	EE	Approved	FD
FINLAND	FI	Approved	FD
FRANCE	FR	Approved	FD
GERMANY	DE	Approved	FD
GREECE	GR	Approved	FD
HONG KONG	HK	Approved	99
HUNGARY	HU	Approved	FD
ICELAND	IS	Approved	FD
INDIA	IN	In Process	99
INDONESIA	ID	Approved	99
IRELAND	IE	Approved	FD
ISRAEL	IL	Approved	B5
ITALY	IT	Approved	FD
JAPAN	JP	Approved	00

Country	Abbreviation	Approval Status	Country Code
KOREA, REPUBLIC OF	KR	Approved	B5
LATVIA	LV	Approved	FD
LIECHTENSTEIN	LI	Approved	FD
LITHUANIA	LT	Approved	FD
LUXEMBOURG	LU	Approved	FD
MALAYSIA	MY	Planned	6C
MALTA	MT	Approved	FD
MEXICO	MX	Approved	B5
MOROCCO	MA	Not Planned	
NETHERLANDS	NL	Approved	FD
NEW ZEALAND	NZ	Approved	7E
NORWAY	NO	Approved	FD
PHILIPPINES	PH	Approved	B5
POLAND	PL	Approved	FD
PORTUGAL	PT	Approved	FD
ROMANIA	RO	Approved	FD
RUSSIAN FEDERATION	RU	Planned	FD
SINGAPORE	SG	Approved	9C
SLOVAKIA	SK	Approved	FD
SLOVENIA	SI	Approved	FD
SOUTH AFRICA	ZA	Approved	9F
SPAIN	ES	Approved	FD
SRI LANKA	LK	Not Planned	
SWEDEN	SE	Approved	FD
SWITZERLAND	CH	Approved	FD
TAIWAN, PROVINCE OF CHINA	TW	Approved	FE
THAILAND	TH	-	B5
TURKEY	TR	Approved	FD
UNITED KINGDOM	GB	Approved	FD
UNITED STATES	US	Approved	B5
URUGUAY	UY	Not Planned	

21. Safety Warnings

21.1. Optional AA Battery Caution

- Use only 3x AA sized rechargeable Ni-MH batteries with a capacity of at least 2000mAh.
- Batteries should all be of the same capacity, manufacturer, and type.
- Do not burn or puncture the batteries. The cells may explode.
- Check with local requirements for possible special disposal instructions.
- When replacing batteries, all batteries should be replaced at the same time.
- Remove the batteries from the product if the product will not be used for some time (several months or more).

● **WARNING:** Risk of explosion if batteries of incorrect type are fitted.

● **WARNING:** Never use non-rechargeable batteries.

21.2. Real Time Clock Battery Caution

A lithium battery (CR1225) on the ip.buffer provides backup power for the time keeping capability. The battery has an estimated life expectancy of ten years. When the battery starts to weaken and the ip.buffer is not powered, the date and time may be incorrect. If the battery fails, the ip.buffer must be sent back to your supplier for battery replacement.

● **WARNING:** There is danger of explosion if the lithium battery is incorrectly replaced.

21.3. Ethernet Ports Caution

The Ethernet and SEBUS ports are not designed to be connected to a Public Telecommunication network.

21.4. Power Supply Caution

This product uses a 10W 7V DC Limited Power Source (LPS) compliant with IEC60950/EN60950.

● **WARNING:** Use of a DC power supply other than the one supplied with the ip.buffer will void the warranty, may void the approvals, and can damage the unit

21.4.1. Scannex Approved PSUs

- Hong Kwang: HK-CP11-A07
- Touch Electronics: SA070507

21.5. General Warnings

- Avoid contact with the ip.buffer or ancillary equipment during an electrical storm; there is a risk of electrical shock.
- Do not use the equipment in the vicinity of a gas leak.
- Avoid contact with liquids and do not use if the unit is suspected to be damp.
- Apart from batteries (optional), no user serviceable parts inside.
- Use indoors only.

21.6. Modem Caution (if fitted)

- Never install phone wiring during a lightning storm.
- Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
- Never touch uninsulated phone wires or terminals unless the phone line has been disconnected at the network interface.
- Use caution when installing or modifying phone lines.
- To reduce risk of fire, use only 26AWG or larger telephone line cord.

21.7. A note about Power Connection, Surge Protectors, and lightning.

Power surges on power lines, such as those caused by lightning strikes, can destroy or damage the ip.buffer. Therefore, we recommend that the DC Power supply and telephone line interfaces are connected via surge protectors.

21.8. South Africa

This ip.buffer must be used in conjunction with an approved surge protection device.

22. Approvals

22.1. Modem

(only applicable to ip.buffer containing a modem)

- FCC Part 68
- UL Listed (E150299)
- R&TTE (Europe)
- IC:125A-0017 (Canada)
- A-tick -ACN 092448710 (Australia & New Zealand)

22.2. EMC

- CE Marks Class B (EN55022, EN55024)
- FCC CFR 47: Part 15 Class B
- CISPR 22 Class B
- CISPR 24
- AS/NZS 3548 Class B (Australia & New Zealand)
- ICES 003 Class B (Canada)

22.3. Safety

- CE (EN60950)
- IEC 60950-1
- CB
- RoHS Compliant

22.4. European Union (EU) Statement

22.4.1. EMC, Safety, and R&TTE Directive Compliance

This is to certify that this product complies with the EU Directive 89/336/EEC and the amending directive 93/68/EEC, relating to Electromagnetic Compatibility, by application of CISPR 22/European Standard EN 55022 (Class B) requirements for Information Technology Equipment and EN55024 and Council Directive 1999/5/EC on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity.

22.4.2. Network Compatibility Declaration

This equipment is designed to work satisfactorily on all European Union PSTN networks.

22.5. Deutsch

Diese Endeinrichtung ist in Konformität EMC-Richtlinien 89/336/EEC und 93/68/EEC

Diese Modem-Karte ist als Endeinrichtung vorgesehen und muss an ein TAE mit F-Kodierung angeschlossen werden

Sicherheitshinweise

- Benutzen Sie dieses Produkt nur mit dem zur Verfügung gestellten Netzgerät, das zu begrenzter Energiequelle (LPS) ausgewertet wird
- Telefonleitungen niemals während Gewittern verlegen.
- Telefonbuchsen nicht in Naßbereichen installieren, es sei denn, die Buchse ist dafür speziell geeignet.
- Unisolierte Telefondrähte und Klemmen niemals anfassen, wenn sie am Verteiler angeschlossen sind.
- Beim Verlegen oder Ändern von Telefonleitungen vorsichtig vorgehen.
- Während Gewittern nicht telefonieren (ausgenommen schnurlose Telefone). Es besteht ein geringes Risiko eines Blitzschlages.
- Bei austretendem Gas kein Telefon in der Nähe der Austrittsstelle benutzen.
- Um die Gefahr des Feuers zu verringern, benutzen Sie 26 AWG oder größeres Telefonleitung kabel
- Vermeiden Kontakt mit Flüssigkefiten
- Öffnen Sie nicht die Maßeinheit
- Nicht im Freien verwenden

22.6. USA

22.6.1. FCC Registration Information

The ip.buffer uses an internal Multi-Tech Modem (MT5656RJ) that has been registered with the Federal Communications Commission (FCC). It meets FCC requirements and may be connected directly to your telephone line. On the bottom of this equipment is a label that contains, among other information, the FCC registration number and Ringer Equivalence Number (REN) for this equipment. If requested, this information must be provided to the telephone company. Use the REN to help determine the maximum number of devices you can connect to your telephone without eliminating their ability to ring when your number is called. In many areas, the sum of the RENs of all devices connected to one line should not exceed 5.0.

To determine how many devices you can connect to your line, contact your local telephone company to find out the maximum REN for your area.

The ip.buffer may not be connected to a party line or coin line telephone network. If the ip.buffer does not function properly, disconnect the unit. If the ip.buffer causes harm to the network, the telephone company may discontinue your service temporarily. If possible, they will notify you in advance. But if advance notice is not practical, the telephone company will notify you as soon as possible.

Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary. The telephone company may make changes in the telephone network. Should these changes affect the ip.buffer, the telephone company must notify you, in writing, to enable you to maintain uninterrupted service.

An FCC-compliant telephone cord and modular plug is provided with this equipment. This equipment is designed to be connected to the telephone network or premises wiring using a compatible modular jack which is Part 68 Compliant.

This equipment uses the following USOC jacks:RJ-11C.

The telco needs to be connected with a minimum 26AWG telephone cable.


22.6.2. Repair Information

According to the FCC, only Multi-Tech (or an authorised repair facility) is allowed to service the modem. Repairs require the removal of the modem and return to Multi-Tech. Please contact your supplier or Scannex for details of how to have repairs made.

22.6.3. FCC Rules Part 15 - Computing Devices

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

 **CAUTION:** Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the ip.buffer.

22.7. Canada

22.7.1. Industry Canada Information

Notice: The Industry Canada label identifies certified equipment. This certification means that the equipment meets telecommunication network protective, operation and safety requirements as prescribed in the appropriate Terminal Equipment Technical Requirements document(s).

The Department does not guarantee the equipment will operate to the user's satisfaction. Before installing this equipment, users should ensure that it is permissible to be connected to the facilities of the local telecommunications company. The equipment must also be installed using an acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be coordinated by a representative designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment. Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe system, if present, are connected together. This precaution may be particularly important in rural areas.

- **Caution:** Users should not attempt to make such connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate.
- **Notice:** The Ringer Equivalence Number (REN) assigned to each terminal device provides an indication of the maximum number of terminals allowed to be connected to a telephone interface. The termination of an interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalence Numbers of all devices does not exceed 5.

22.7.2. Industry Canada Regulatory Compliance Information for Class B Equipment

This Class B digital apparatus complies with Canadian ICES-003.

AVIS: Cet appareil numérique respecte les limites de bruits radioélectriques applicables aux appareils numériques de classe B prescrites dans la norme sur le matériel brouilleur:

“Appareils Numériques”, NMB-003 édictée par l’Industrie Canada.

L’étiquette d’Industrie Canada identifie le matériel homologué.

Cette étiquette certifie que le matériel est conforme aux normes de protection, d’exploitation et de sécurité des réseaux de télécommunications, comme le prescrivent les documents concernant les exigences techniques relatives au matériel terminal. Le Ministère n’assure toutefois pas que le matériel fonctionnera à la satisfaction de l’utilisateur.

Avant d’installer ce matériel, l’utilisateur doit s’assurer qu’il est permis de le raccorder aux installations de l’entreprise locale de télécommunication. Le matériel doit également être installé en suivant une méthode acceptée de raccordement.

L’abonné ne doit pas oublier qu’il est possible que la conformité aux conditions énoncées ci-dessus n’empêche pas la dégradation du service dans certaines situations. Les réparations de matériel homologué doivent être coordonnées par un représentant désigné par le fournisseur. L’entreprise de télécommunications peut demander à l’utilisateur de débrancher un appareil à la suite de réparations ou de modifications effectuées par l’utilisateur ou à cause de mauvais fonctionnement.

23. European Union Waste Electrical and Electronic Equipment (WEEE) Statement.

23.1. UK Users

In the UK Scannex is registered as a WEEE producer and has responsibility for the recycling of Scannex products and any products returned to Scannex, postage paid, will be recycled at Scannex's cost.

23.2. European Users (outside the UK)

Where the supplier of Scannex products is resident in your country then the supplier acts as the importer of the equipment. Thus the supplier has the legal responsibility to deal with recycling:

If the supplier of Scannex products is not resident in your country then the business end-user acts as the importer of the product. It is Scannex understanding that in this situation:

- No organisation is required to register as the WEEE producer
- No organisation is required to provide WEEE collection and recycling arrangements.

23.3. Manufacturer/Responsible Party

Scannex Electronics Ltd

Unit 8 English Business Park
English Close
Hove, East Sussex
BN3 7ET
UK

Tel: +44 (0)1273 715460

<http://www.scannex.co.uk>

Scannex LLC

7400 Beaufont Springs Drive
Suite 300
Richmond, VA 23225
USA

Tel: +1-866-428-3337

<http://www.scannex.com>